BUILT — WE BUILD CONTRACTORS. —


Jesse McCoun · (330) 500-6701 · jesse.built@outlook.com

SHINGLE ROOF ESTIMATE

Log home with attached garage

Belmont County, Ohio · prepared November 6, 2026 · SAMPLE, NAMES REMOVED

ROOF AREA	SQUARES WITH 10% WASTE	ESTIMATED TOTAL
6,771 sq ft	74.5	$42,711

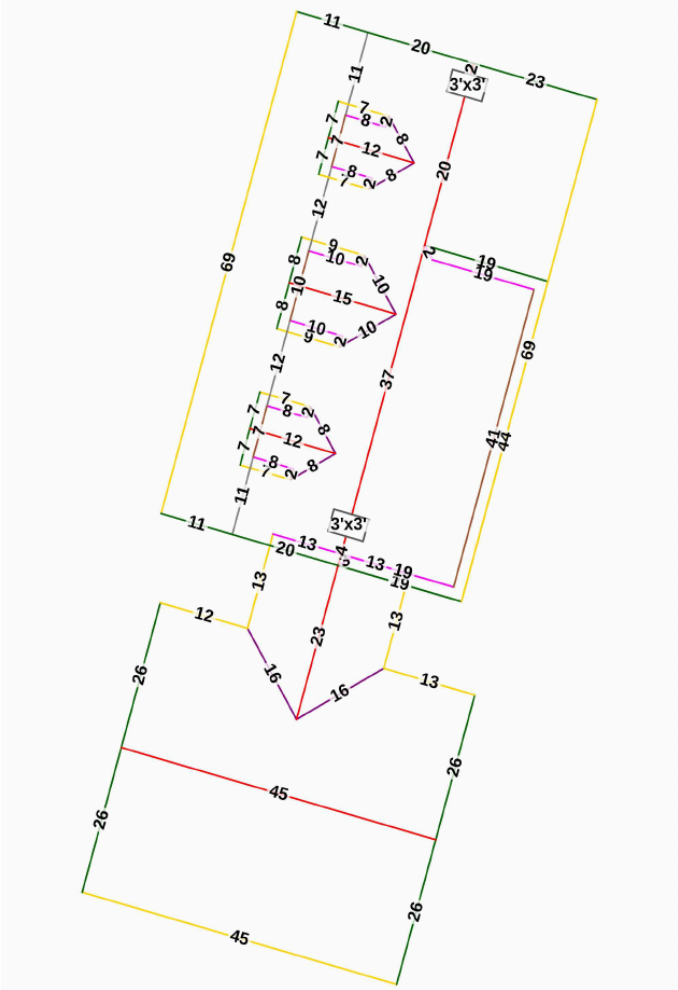

Ridge red, valley purple, rake green, eave yellow, sidewall flashing pink, headwall brown, transition gray. Lengths in feet.

Roof measurements

Roof area	6,771 sq ft
Squares (no waste)	67.7
Squares with 10% waste	74.5
Pitch	10/12 (76%), 5/12 (24%)
Facets	14
Ridge	171 ft
Valley	86 ft
Rake	292 ft
Eave	325 ft
Sidewall flashing	118 ft
Headwall flashing	74 ft
Transition	45 ft
Chimneys	2
Chimney step / apron / counter	25 / 12 / 37 ft

Summary

Materials	$16,784.45
Sales tax (7.25%)	$1,216.87
Labor (example)	$24,710.50
Estimated total	**$42,711.82**
Per square installed	$630.90

Jesse McCoun · (330) 500-6701 · jesse.built@outlook.com

MATERIAL LIST

Priced shingle material order

Quantities at 10% waste. One system shown (GAF); Owens Corning, CertainTeed and Malarkey quantities are the same for shingles and close for the rest.

ITEM	QTY	UNIT	UNIT PRICE	EXTENDED
Shingles (GAF Timberline HDZ system)				
GAF Timberline HDZ architectural shingles	225	bundle	$42.00*	$9,450.00
GAF Pro-Start starter strip	7	bundle	$54.97	$384.79
GAF Seal-A-Ridge hip and ridge cap	8	bundle	$72.00*	$576.00
Underlayment				
GAF FeltBuster synthetic underlayment, 10 sq roll	9	roll	$119.00	$1,071.00
GAF WeatherWatch ice and water shield, 36" at eaves and valleys	16	roll	$129.00	$2,064.00
Metals and flashing				
Eave drip edge, aluminum 10 ft	37	piece	$11.48	$424.76
Rake drip edge, aluminum 10 ft	33	piece	$11.48	$378.84
W-valley metal, 10 ft	10	piece	$25.00*	$250.00
Step flashing 5×7 (walls and dormers)	445	piece	$0.65*	$289.25
Counter flashing, 10 ft	18	piece	$15.00*	$270.00
Headwall flashing, 10 ft	14	piece	$15.00*	$210.00
Chimney apron (front)	4	each	$25.00*	$100.00
Chimney back pan / cricket	4	each	$45.00*	$180.00
Chimney step flashing	60	piece	$0.65*	$39.00
Chimney counter flashing, 10 ft	5	piece	$15.00*	$75.00
Ventilation				
GAF Cobra Rigid Vent 3 ridge vent, 4 ft	48	piece	$12.97	$622.56
Fasteners and sealant				
Coil roofing nails 1¼", 7,200 ct	5	box	$49.98	$249.90
Plastic cap nails	3	box	$39.00	$117.00
Roofing sealant, 10.1 oz	5	tube	$6.47	$32.35
Materials subtotal				**$16,784.45**
Ohio sales tax, 7.25% (estimate)				**$1,216.87**
Materials with tax				**$18,001.32**

Prices are online retail listings checked November 6, 2026 (Home Depot unless noted). *Typical 2026 price where no listing was shown. Supplier and contractor pricing will differ; ask your supplier for a quote with this list.

Jesse McCoun · (330) 500-6701 · jesse.built@outlook.com

LABOR AND PROJECT TOTAL

Contractor labor (example)

ITEM	QTY	UNIT	RATE	EXTENDED
Tear-off, 1 layer, with haul-away	67.7	sq	$115.00	$7,785.50
Install, steep 10/12 with dormers	67.7	sq	$250.00	$16,925.00
Labor subtotal				**$24,710.50**

Example rates for a steep, cut-up roof in Ohio (published 2026 ranges: install $225 to $300 per square for complex roofs with dormers, tear-off $100 to $125 per square for one layer). Labor is figured on 67.7 squares of roof area.

Project total

Materials with tax	$18,001.32
Labor (example)	$24,710.50
Estimated total	**$42,711.82**

That is about $630.90 per square installed.


For contractors: BUILT can send this estimate under your company name and logo, with your own labor rates, tear-off, disposal and markup, so it goes straight to your customer. Send your rates once and every estimate uses them.


Not included

Decking replacement (priced per sheet if found rotten), pipe boots and exhaust vents (counted on site), gutters, skylights, permits, and a dumpster if the contractor's tear-off price does not include haul-away. Measurements come from aerial imagery; the installer verifies them before ordering.


ROOF DIAGRAMS

3D views, pitches and areas

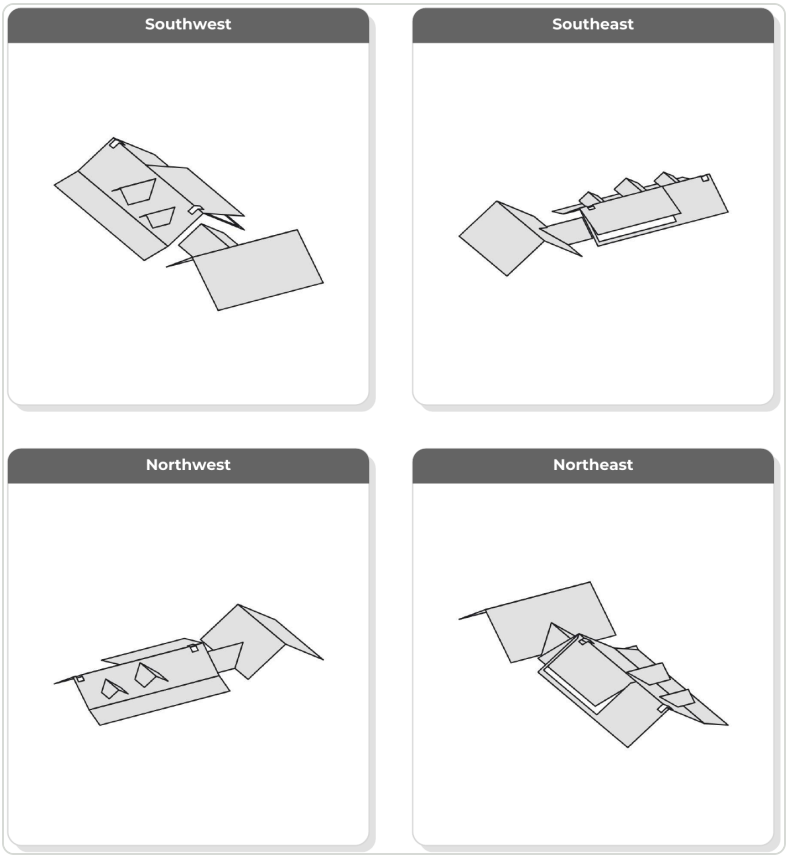

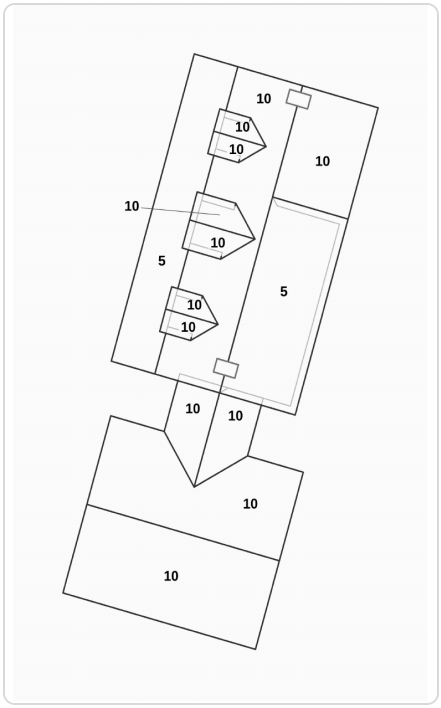

Pitch by facet: 10/12 on 5,175 sq ft, 5/12 on 1,597 sq ft.

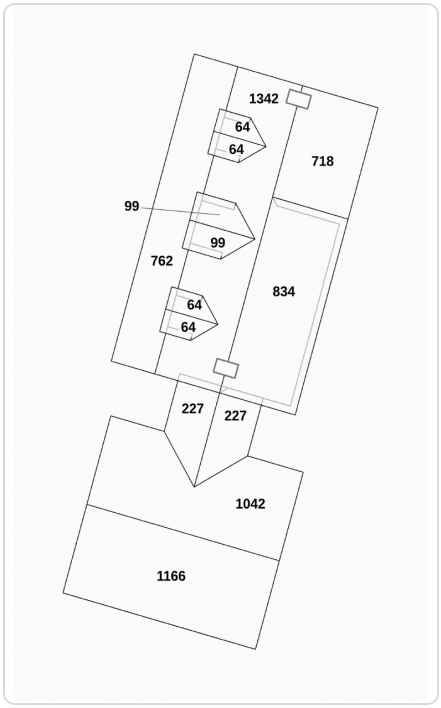

Area by facet, square feet.

Jesse McCoun · (330) 500-6701 · jesse.built@outlook.com

IMPORTANT LEGAL NOTICE AND LIMITATIONS

MATERIAL TAKEOFF ONLY — NOT ENGINEERING OR CONSTRUCTION DRAWINGS

This report is provided solely as a preliminary material-quantity estimate based on information supplied by the customer and the calculator settings shown in the report. Jesse McCoun and BUILT are not licensed professional engineers or architects. This report is not an engineered design, architectural or construction drawing, permit drawing, structural analysis, certification, or representation of structural adequacy, code compliance, or permit approval.

This report does not determine or verify design loads; wind, snow, rain, flood, or seismic requirements; soil or site conditions; foundations or post embedment; truss or component engineering; member sizes, spans, connections, or bracing; fire and life-safety requirements; zoning; utilities; mechanical, electrical, plumbing, or HVAC systems; accessibility; energy-code compliance; or any other project-specific legal or code requirement.

Before ordering materials, applying for a permit, or beginning construction, the owner, customer, contractor, and suppliers are responsible for independently verifying all dimensions, quantities, specifications, opening locations, field conditions, product requirements, and applicable codes. Obtain all required approvals and any structural design or sealed drawings from a properly licensed design professional and the authority having jurisdiction. Supplier-engineered components must be reviewed and installed according to their approved drawings and instructions.

This report is an estimating aid only and must not be relied upon as a substitute for professional design, engineering judgment, permit approval, manufacturer instructions, or field verification. Quantities and specifications may change after engineering, supplier review, code review, or site verification. To the fullest extent permitted by applicable law, BUILT makes no warranty that this report is complete, structurally adequate, code compliant, fit for a particular construction purpose, or acceptable for permitting, and is not responsible for errors or losses resulting from inaccurate or incomplete customer information, unverified conditions, substitutions, later changes, or use of this report beyond its stated estimating purpose.

RECIPIENT ACKNOWLEDGMENT

By ordering, accepting, or using this report, the recipient acknowledges these limitations and accepts responsibility for obtaining all required professional review, engineering, field verification, permits, and approvals before construction.