**Jesse McCoun**
Cell / text (330) 500-6701
jesse.built@outlook.com

POLE-BARN TAKEOFF

# Complete Project Report

Material quantities only · no prices

| PROJECT | CUSTOMER | JOB / PROJECT ID |
|---|---|---|
| Sample: 40×80 stepped shop house with wraparound porch | Sample Customer | SAMPLE |
| **REVISION** | **ESTIMATOR** | **TAKEOFF STATUS** |
| 0 | BUILT | HUMAN REVIEW REQUIRED |

**BUILT Standard · version 1** HUMAN REVIEW REQUIRED BUILT-TAKEOFF-2026.08-P2


## 01 Building specification summary

| | | |
|---|---|---|
| **Main building** | **40′ wide × 80′ long · 10′/14′ stepped eaves** | 4/12 metal gable roof |
| **Connected sections** | **48′ front/living at 10′** | 32′ rear/garage at 14′ · 160 sq ft transition wall |
| **Overhangs** | **12″ eaves · 12″ gables** | horizontal projection |
| **Structural layout** | **8′ side posts · 8′ gable posts** | 4′ trusses · 24″ purlins · 24″ girts |
| **Permanent truss bracing** | **2 bottom-chord restraint rows** | 4 corner-to-center diagonal runs · truss-supplier verification required |
| **Wall and roof finish** | **Exposed-fastener metal walls** | 36″ coverage metal roof |
| **Vapor barrier** | **Single bubble white/foil · roof only** | 8 × 4′ × 125′ rolls · 3,630 sq ft |
| **Roof edge trim** | **Residential rake on the gable edges** | 8 × 12′ made-to-length · J&F channel on the eaves |
| **Wainscot** | **None** | Wall #e9e8e1 · roof #45494b · trim #ecebe5 |
| **Interior** | **No wall liner · no ceiling liner · 40′ × 10′ lined partition** | No wall insulation · no partition insulation · no ceiling insulation |

SAMPLE

## FRONT-LEFT EXTERIOR



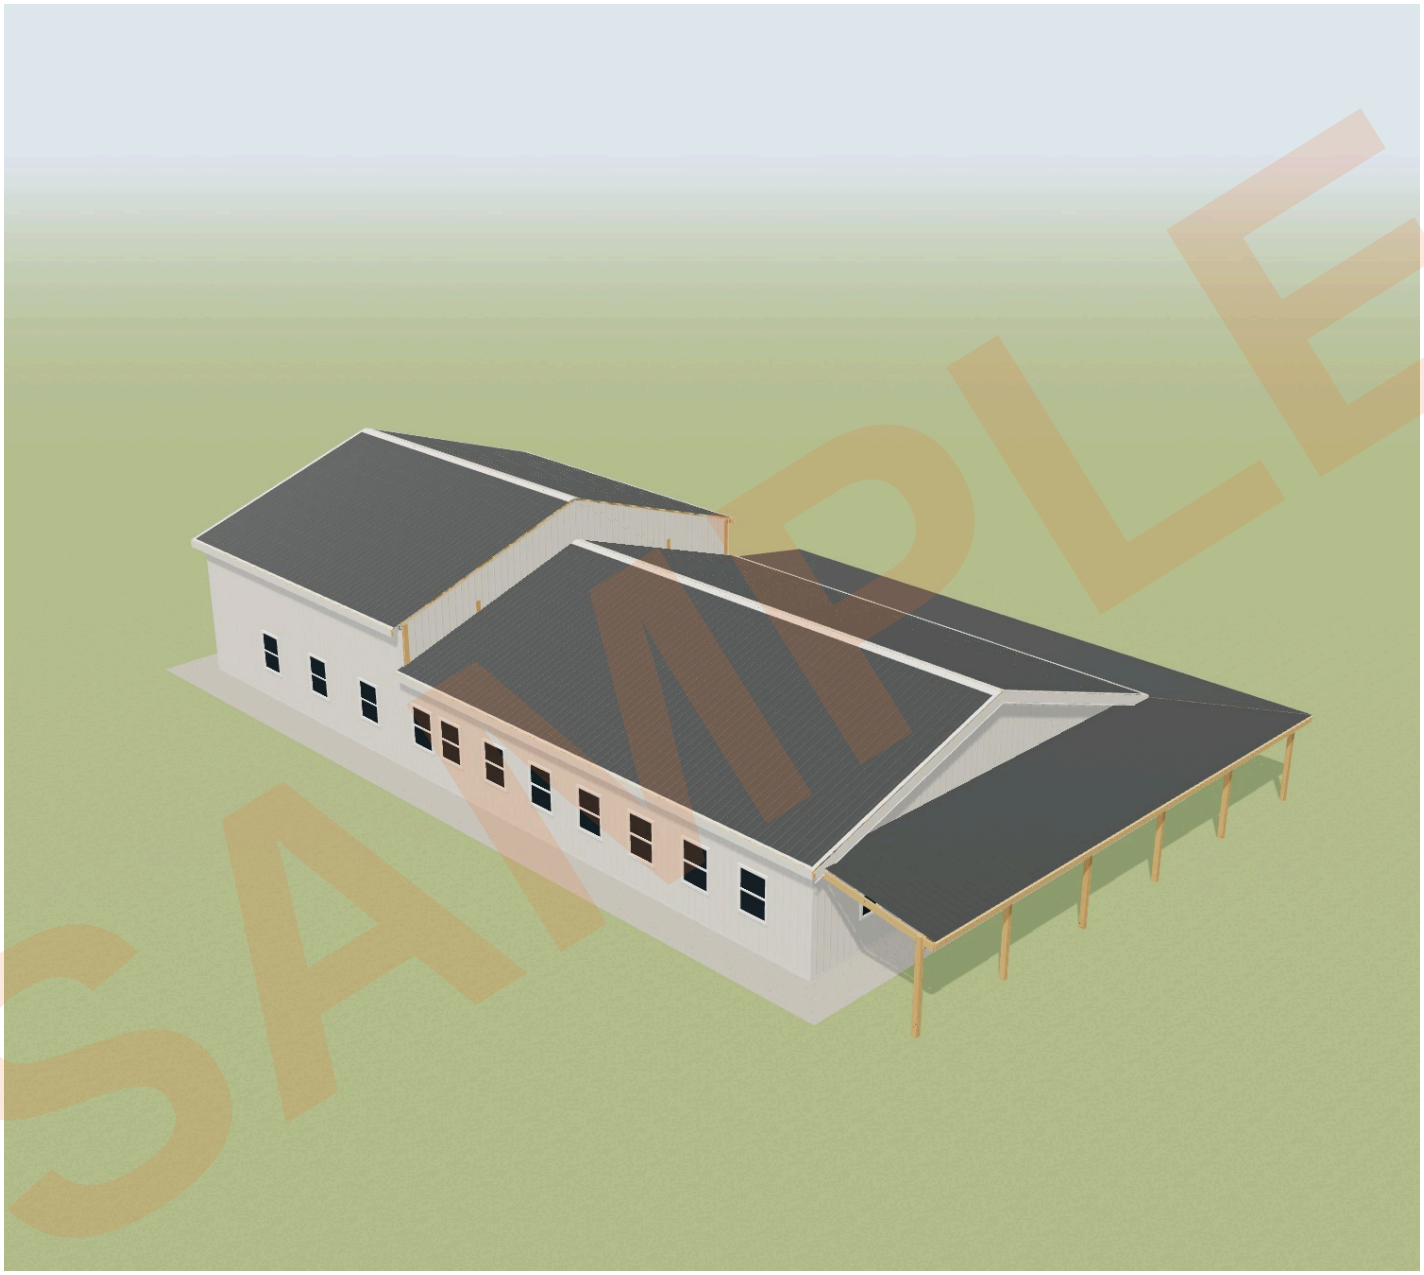


Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## FRONT-RIGHT EXTERIOR



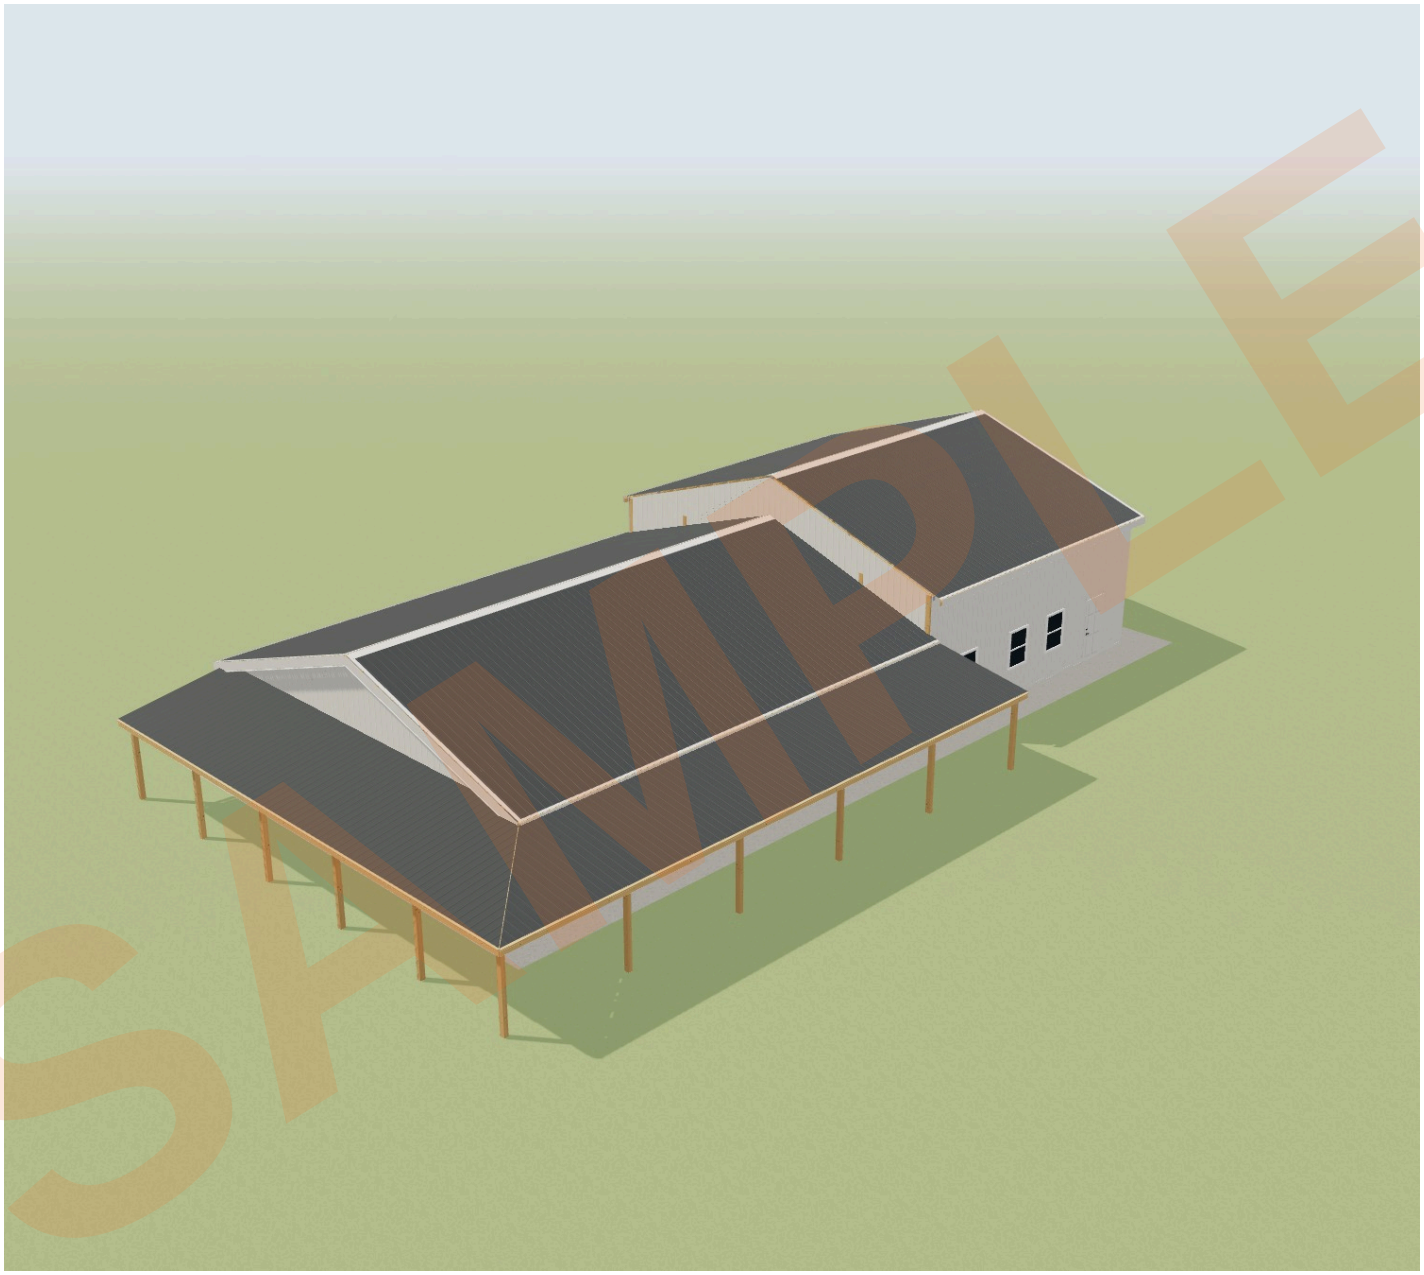

Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## REAR-LEFT EXTERIOR





Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## REAR-RIGHT EXTERIOR






Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## FRAMING VIEW

REALISTIC MODEL · ACTUAL LUMBER SIZES

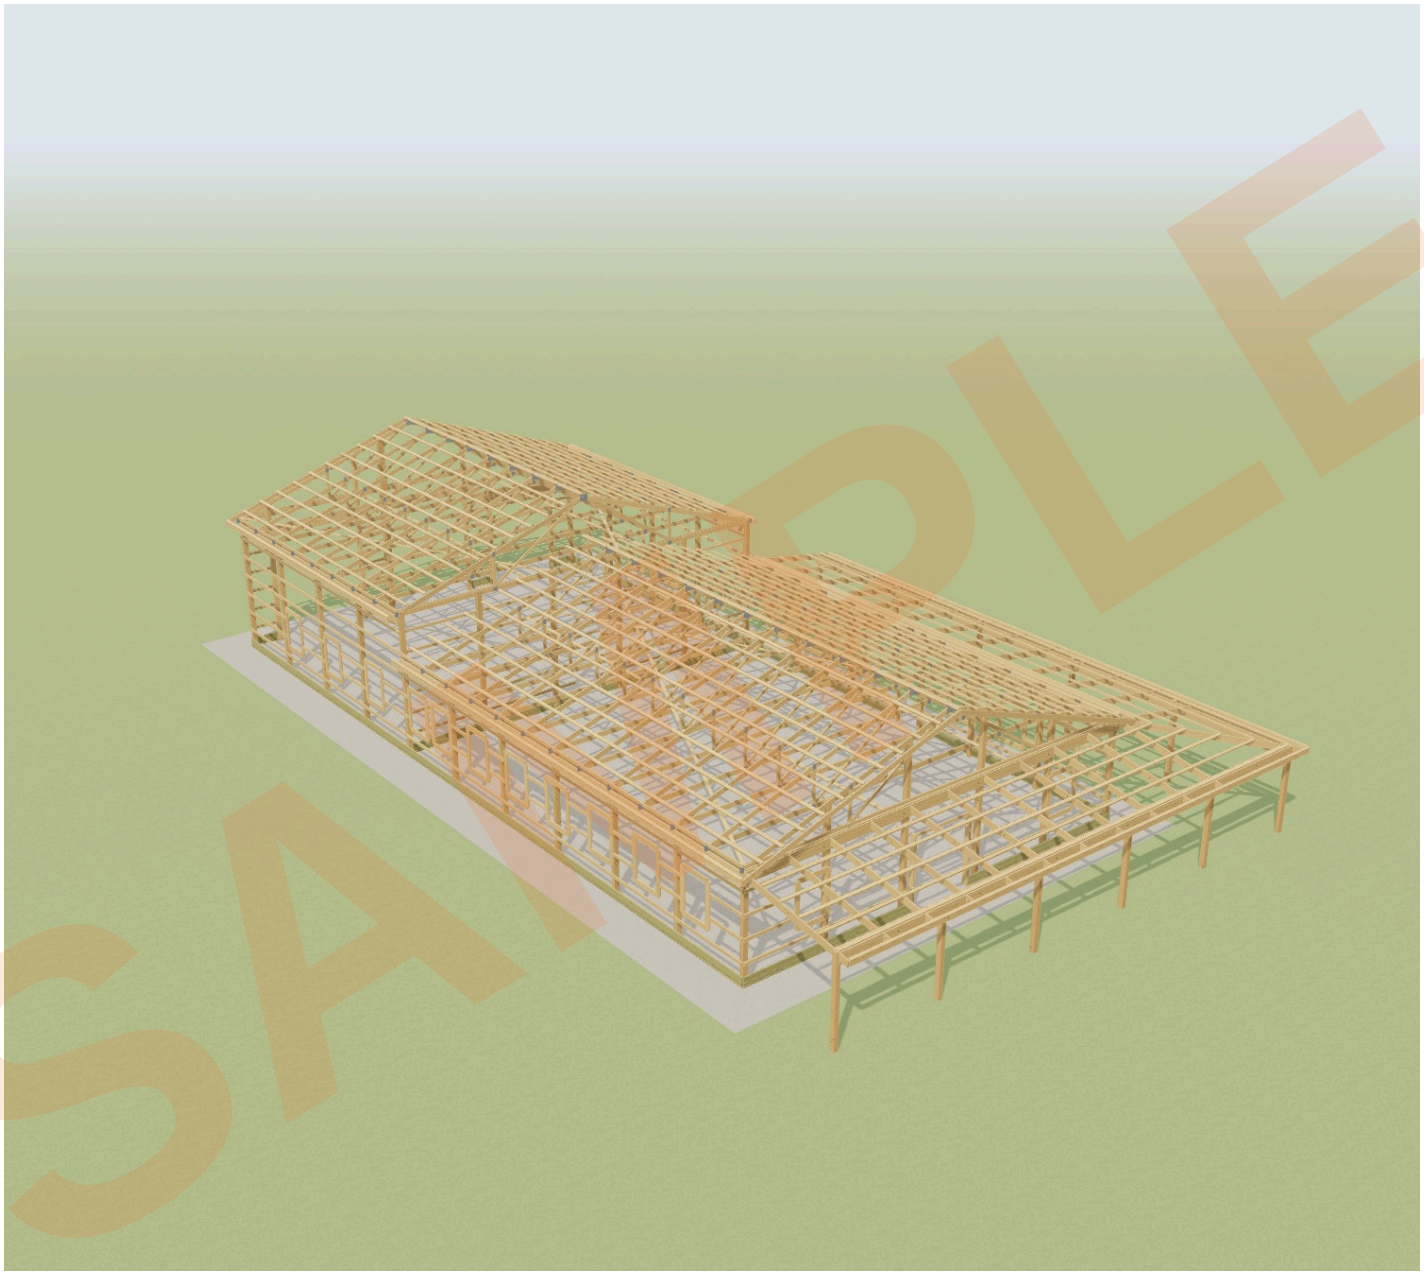


Framing drawn from the same components as the lumberyard order: posts, carriers, trusses, purlins, girts, skirt and opening framing.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## EXPLODED VIEW

LAYERS PULLED APART IN INSTALL ORDER

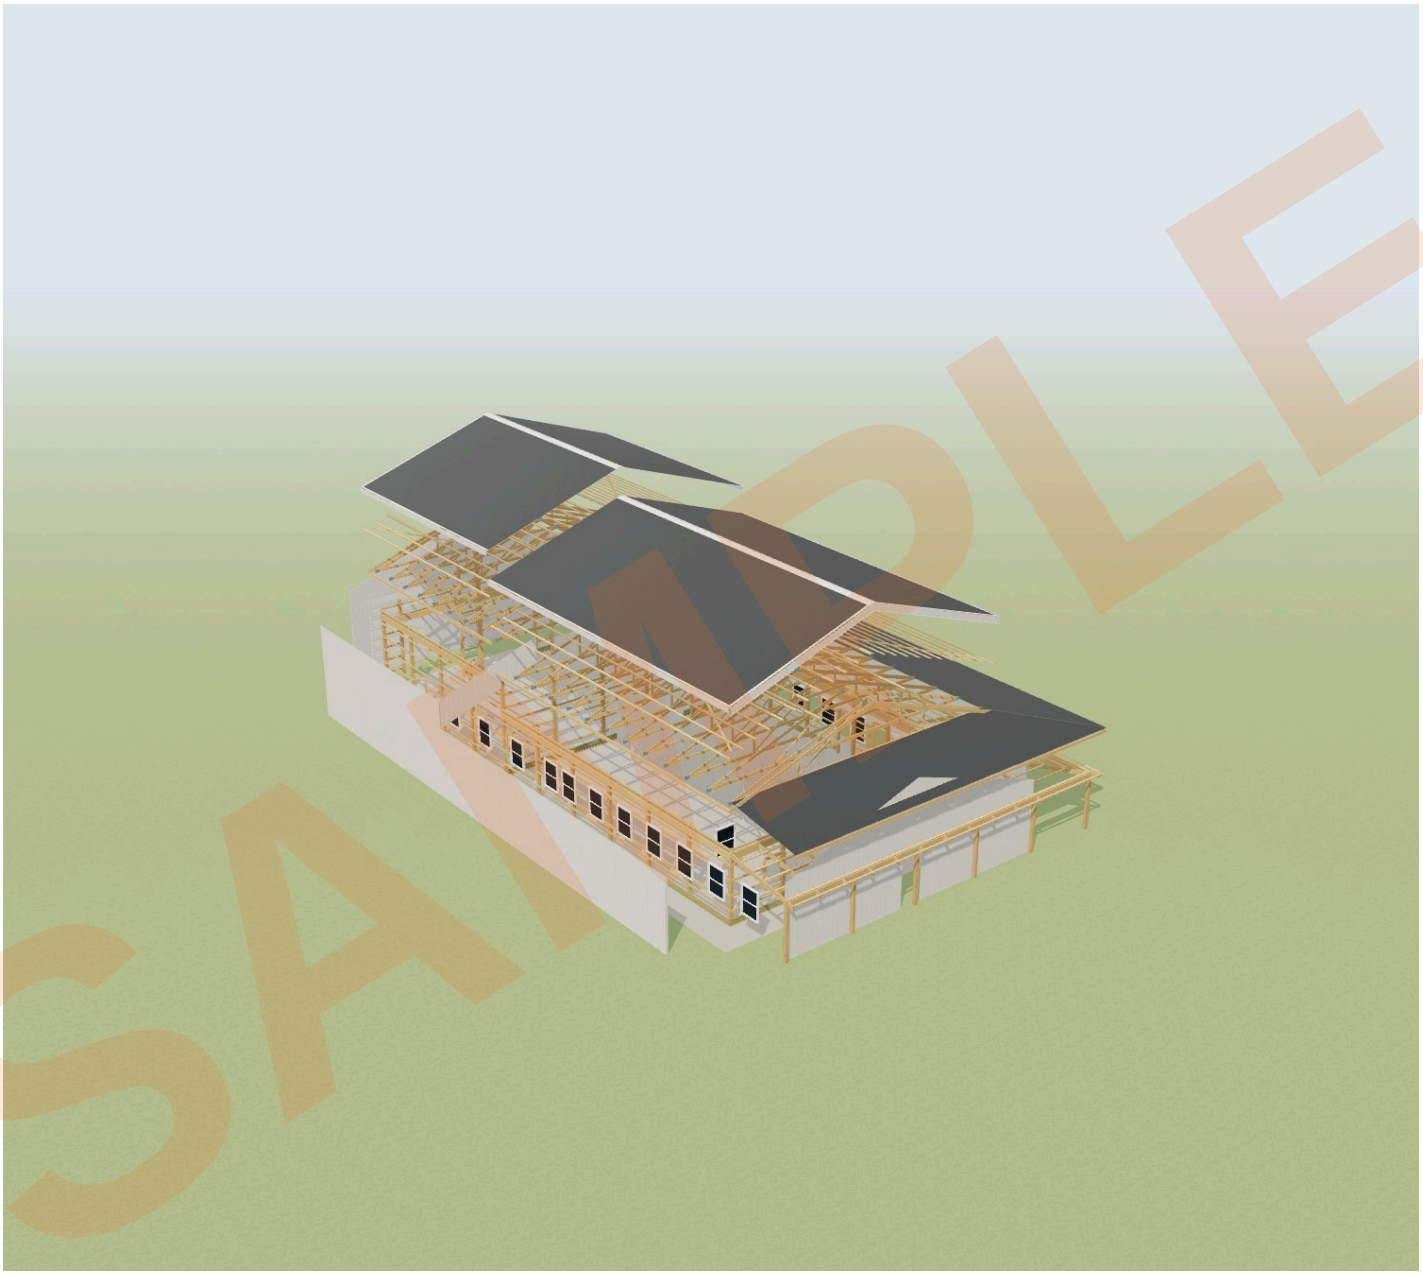

Frame, trusses, purlins, roof covering and wall covering separated to show how the ordered materials fit together.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## 03 Openings and attached roofs

| Opening / assembly | Location | Size |
|---|---|---|
| **2 × Overhead garage doors** | **Rear gable** | 10′ × 12′ |
| **1 × Overhead garage door** | **Rear gable** | 8′ × 10′ |
| **1 × Sliding door** | **Front gable** | 6′ × 6′ 8″ |
| **2 × Man doors** | **Right sidewall** | 36″ × 80″ |
| **22 × Windows** | **Left sidewall · Right sidewall · Front gable** | 36″ × 48″ |
| **Interior passage door** | **Living/garage partition** | 36″ × 80″ · preliminary offset 18.5′ |
| **Attached roof #1** | **Front-right corner** | 40′ + 48′ legs × 10′ projection |

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## 04 Consolidated lumberyard order

Every piece to pull, grouped the way the yard stocks it. Identical sizes and lengths are totaled into one line.

| | QTY | ITEM | LENGTH | USED FOR |
|---|---|---|---|---|
| **POSTS AND COLUMNS** | | | | |
| ☐ | **23 pcs** | **Perma-Column post-frame columns** | **16′** | Sidewall/corner columns · Attached roof #1 outside columns |
| ☐ | **17 pcs** | **Perma-Column post-frame columns** | **20′** | Sidewall/corner columns · Gable-interior columns · Living-section back-gable interior columns · Living-section back-gable man-door support column |
| ☐ | **4 pcs** | **Perma-Column post-frame columns** | **22′** | Gable-interior columns · Additional opening columns |
| ☐ | **1 pc** | **Perma-Column post-frame columns** | **24′** | Additional opening columns |
| ☐ | **4 pcs** | **Perma-Column post-frame columns** | **26′** | Gable-interior columns · Additional opening columns |
| **TRUSSES** | | | | |
| ☐ | **18 pcs** | **Common truss, 40′ span · 4/12** | | Engineered; build to the supplier's drawings |
| ☐ | **3 pcs** | **Gable-end truss, 40′ span · 4/12** | | Engineered; build to the supplier's drawings |
| **TREATED LUMBER** | | | | |
| ☐ | **30 pcs** | **Treated 2×6** | **16′** | Treated baseboards / skirt boards |
| **FRAMING LUMBER** | | | | |
| ☐ | **377 pcs** | **2×4** | **16′** | Wall girts · Spare allowance · Roof purlins · Truss lateral restraint · Truss diagonal bracing · Man, sliding and passage door header stock · Attached roof #1 roof purlins |
| ☐ | **20 pcs** | **2×4** | **20′** | Wall girts |
| ☐ | **45 pcs** | **2×6** | **16′** | Eave and rake fascia · Window rough-opening box framing · Attached roof #1 fascia |
| ☐ | **24 pcs** | **2×8** | **12′** | Attached roof #1 common and jack rafters |
| ☐ | **1 pc** | **2×8** | **16′** | Attached roof #1 structural hip rafter |
| ☐ | **2 pcs** | **2×12** | **10′** | Overhead-door header #3 — Rear gable |
| ☐ | **4 pcs** | **2×12** | **12′** | Overhead-door header #1 — Rear gable · Overhead-door header #2 — Rear gable |
| ☐ | **20 pcs** | **2×12** | **16′** | Sidewall truss carriers |
| ☐ | **13 pcs** | **2×12** | **24′** | Attached roof #1 inside attachment header / ledger · Attached roof #1 outside post-line header / beam |
| ☐ | **8 pcs** | **Garage/sliding/man-door jamb and support framing (profile verification)** | **16′** | Garage/sliding/man-door jamb and support framing |
| **HARDWARE AND FASTENERS** | | | | |
| ☐ | **49 pcs** | **Perma-Column foundation units** | | One per embedded column: 38 main building + 11 attached roof |
| ☐ | **5 boxes** | **3″ galvanized framing nails** | **500/box** | Framing nails |

SAMPLE

05

# Consolidated metal-shop order — panels and trim

Panels are cut to the lengths shown, longest first, with identical lengths in the same color totaled. Trim is in stock lengths unless marked cut to fit.

| | QTY | ITEM | LENGTH | COLOR | USED FOR |
|---|---|---|---|---|---|
| **ROOF PANELS** | | | | | |
| ☐ | **37 pcs** | **Attached-roof blank (shop cuts taper)** | **11′ 2 13/16″** | Charcoal | Attached roof #1 |
| ☐ | **56 pcs** | **Roof panel** | **22′ 1 5/8″** | Charcoal | Living section · Left roof slope · Garage section · Left roof slope · Living section · Right roof slope · Garage section · Right roof slope |
| **WALL PANELS** | | | | | |
| ☐ | **1 pc** | **Wall panel** | **20′** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **19′ 4″** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **19′** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **18′ 4″** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **16′ 4″** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **16′** | White | Front gable |
| ☐ | **2 pcs** | **Wall panel** | **15′ 4″** | White | Front gable · Rear gable |
| ☐ | **2 pcs** | **Wall panel** | **15′** | White | Front gable · Rear gable |
| ☐ | **2 pcs** | **Wall panel** | **14′ 4″** | White | Front gable · Rear gable |
| ☐ | **23 pcs** | **Wall panel** | **14′** | White | Left sidewall · Right sidewall · Front gable |
| ☐ | **1 pc** | **Wall panel** | **13′ 4″** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **13′** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **12′ 4″** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **12′** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **11′ 4″** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **11′** | White | Front gable |
| ☐ | **1 pc** | **Wall panel** | **10′ 4″** | White | Front gable |
| ☐ | **33 pcs** | **Wall panel** | **10′** | White | Left sidewall · Right sidewall · Front gable |
| ☐ | **1 pc** | **Wall panel** | **8′ 8″** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **8′ 4″** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **7′ 4″** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **6′ 4″** | White | Rear gable |
| ☐ | **1 pc** | **Wall panel** | **6′** | White | Rear gable |
| ☐ | **14 pcs** | **Wall panel** | **5′** | White | Rear gable · Stepped transition wall |
| ☐ | **1 pc** | **Wall panel** | **4′ 4″** | White | Stepped transition wall |
| ☐ | **1 pc** | **Wall panel** | **4′** | White | Rear gable |
| **LINER PANELS** | | | | | |
| ☐ | **14 pcs** | **Partition liner panel** | **10′** | White | Living/garage separation wall · garage face |
| **TRIM** | | | | | |
| ☐ | **9 pcs** | **Ridge cap** | **10′** | White | Main ridge |
| ☐ | **31 pcs** | **J&F eave channel** | **10′** | White | Eaves |

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

| | QTY | ITEM | LENGTH | COLOR | USED FOR |
|---|---|---|---|---|---|
| ☐ | 8 pcs | Residential rake | 12′ | White | Gable rakes · made-to-length 10′–20′ |
| ☐ | 6 pcs | Sidewall flashing | 10′ | White | Lower roof at the stepped wall |
| ☐ | 10 pcs | Attached-roof transition flashing | 10′ | White | Where attached roofs meet the wall |
| ☐ | 2 pcs | Hip cap | 10′ | White | Attached-roof hips |
| ☐ | 2 pcs | Outside corner | 14′ | White | Cut to length · building corners |
| ☐ | 3 pcs | Outside corner | 10′ | White | Cut to length · building corners · 10′ stock, cut 2 @ 4′ step-return corners |
| ☐ | 26 pcs | Base trim / rat guard | 10′ | White | Wall bottoms, door openings deducted · 237 LF |
| ☐ | 4 pcs | Garage-door jamb and header trim | 12′ | White | Cut to length · overhead door jambs |
| ☐ | 4 pcs | Garage-door jamb and header trim | 10′ | White | Cut to length · overhead door headers and jambs |
| ☐ | 1 pc | Garage-door jamb and header trim | 8′ | White | Cut to length · overhead door headers |
| ☐ | 42 pcs | Door and window J trim | 10′ | White | Windows, man doors and sliding door · 360 LF |
| ☐ | 66 LF | Window sill trim | Cut to fit | White | Window and vent sills |
| **VAPOR BARRIER** | | | | | |
| ☐ | 8 rolls | Single bubble vapor barrier | 4′ × 125′ roll | White/Foil | Under roof metal 3,630 sq ft · 2″ seam laps |
| **CLOSURES, SEALANT AND SCREWS** | | | | | |
| ☐ | 328 LF | Ridge and eave closures | Supplier package | | Inside/outside profile to match the panel |
| ☐ | 21 rolls | M-Seal expanding foam seal tape | 13′ roll | | Two runs at transition flashing |
| ☐ | 3,789 pcs | Roof panel screws | | Charcoal | Main roof · 80/100 sq ft · Attached roofs · 80/100 sq ft |
| ☐ | 2,063 pcs | Wall panel screws | | White | 80/100 sq ft |


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

# Post Layout

**Sample: 40×80 stepped shop house with wraparound porch**

40′ × 80′ · revision 0

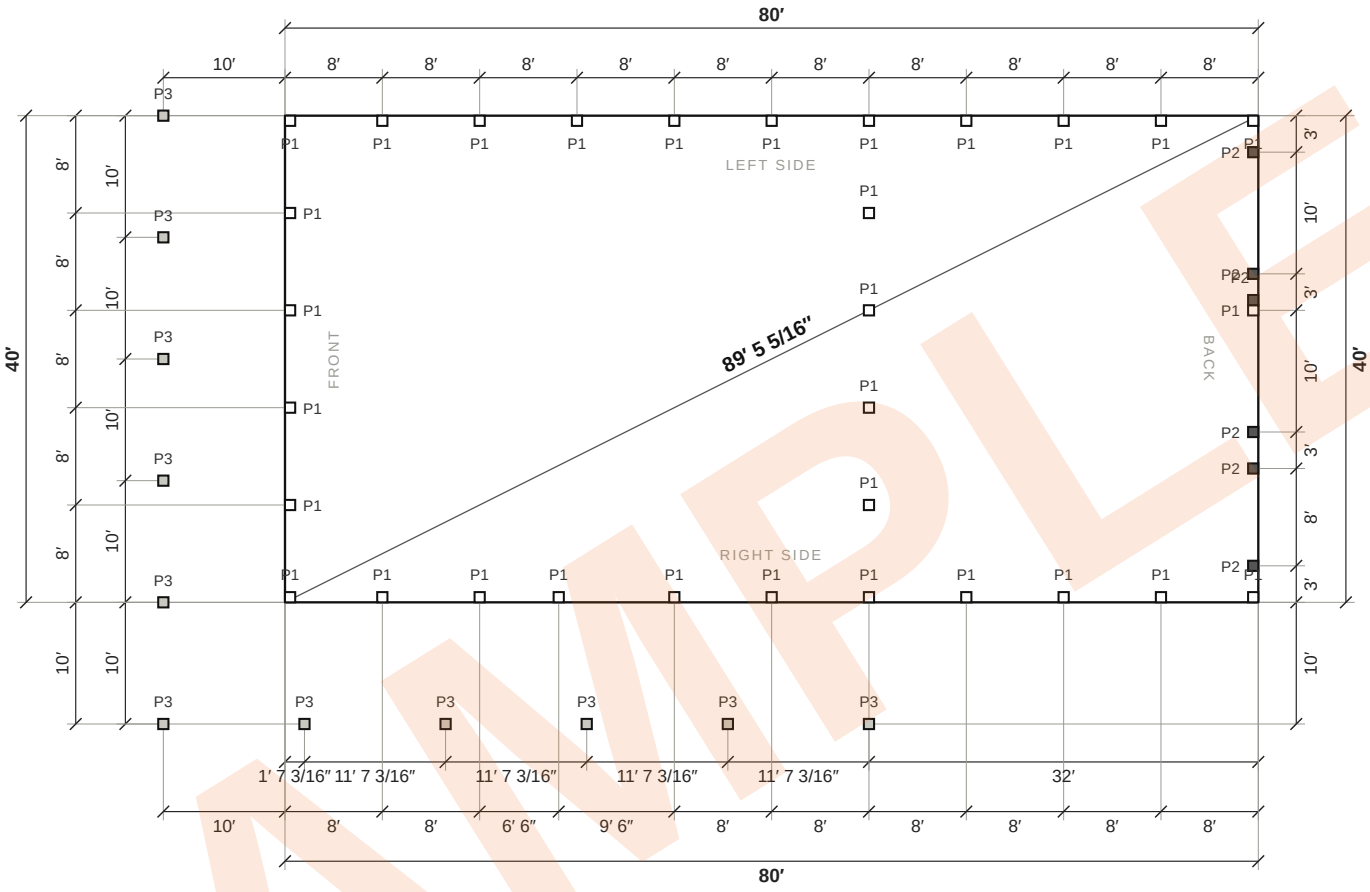


SAMPLE

CHECK SQUARE

## 89′ 5 5/16″


Both diagonals, outside corner to outside corner, read the same when the building is square.

| | |
|---|---|
| **P1** | **31 × Wall columns**<br>Perma-Column post-frame columns · 12 × 16′ · 16 × 20′ · 2 × 22′ · 1 × 26′<br>Perma-Column foundation units · 18″ hole × 4′ deep |
| **P2** | **6 × Door-opening jamb columns**<br>Perma-Column post-frame columns · 2 × 22′ · 1 × 24′ · 3 × 26′<br>Perma-Column foundation units · 18″ hole × 4′ deep |
| **P3** | **11 × Attached-roof posts**<br>Perma-Column post-frame columns · 11 × 16′<br>Perma-Column foundation units · 18″ hole × 4′ deep |

Dimensions run to the outside face of the corner posts and to the centre of every other post. Girts and metal are outside this line.

SAMPLE ONLY - BUILT - not for construction or ordering

## 06 Post layout

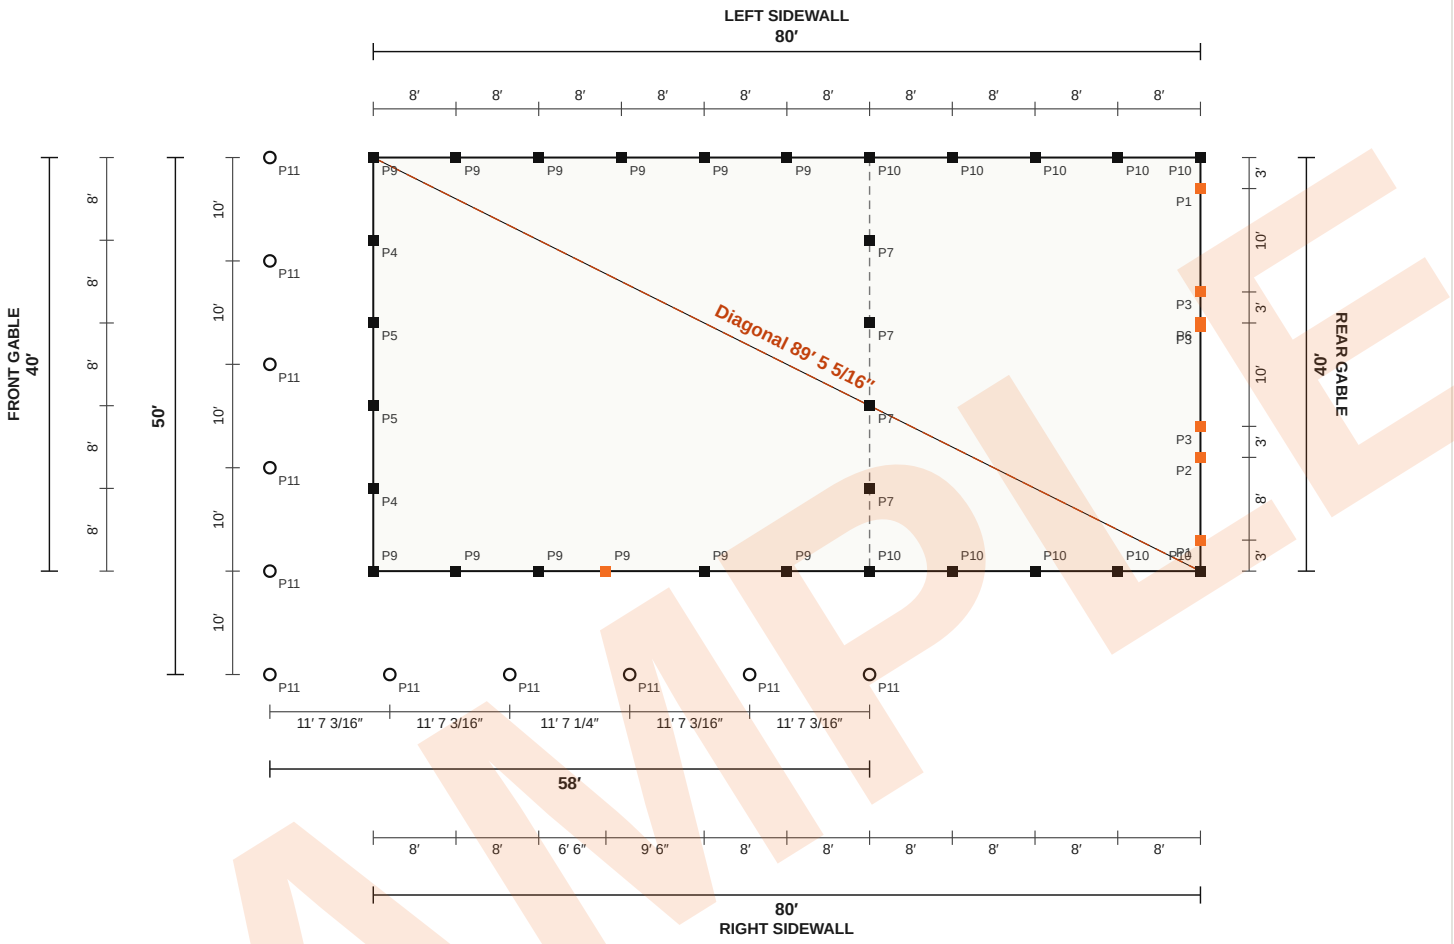


| Tag | Post | Qty | Column length | Hole and footing |
|---|---|---|---|---|
| **P1** | **Perma-Column post-frame columns · additional opening columns** | 2 | 22′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P2** | **Perma-Column post-frame columns · additional opening columns** | 1 | 24′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P3** | **Perma-Column post-frame columns · additional opening columns** | 3 | 26′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P4** | **Perma-Column post-frame columns · gable-interior columns** | 2 | 20′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P5** | **Perma-Column post-frame columns · gable-interior columns** | 2 | 22′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P6** | **Perma-Column post-frame columns · gable-interior** | 1 | 26′ | 18″ hole × 4′ deep · Perma-Column foundation units |

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

| Tag | Post | Qty | Column length | Hole and footing |
|---|---|---|---|---|
| | **columns** | | | |
| **P7** | **Perma-Column post-frame columns · living-section back-gable interior columns** | 4 | 20′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P8** | **Perma-Column post-frame columns · living-section back-gable man-door support column** | 1 | 20′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P9** | **Perma-Column post-frame columns · sidewall/corner columns** | 12 | 16′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P10** | **Perma-Column post-frame columns · sidewall/corner columns** | 10 | 20′ | 18″ hole × 4′ deep · Perma-Column foundation units |
| **P11** | **Attached-roof posts** | 11 | See attached-roof order | 18″ hole × 4′ deep · Perma-Column foundation units |

Orange posts frame a doorway (overhead, sliding or man door); black posts are wall and corner posts.

Spacing is measured along each wall from the outside corner of the building to the center of each post; corner posts sit inside the corner. Square the layout so both corner-to-corner diagonals read 89′ 5 5/16″.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## IMPORTANT LEGAL NOTICE AND LIMITATIONS

### MATERIAL TAKEOFF ONLY — NOT ENGINEERING OR CONSTRUCTION DRAWINGS

This report is provided solely as a preliminary material-quantity estimate based on information supplied by the customer and the calculator settings shown in the report. Jesse McCoun and BUILT are not licensed professional engineers or architects. This report is not an engineered design, architectural or construction drawing, permit drawing, structural analysis, certification, or representation of structural adequacy, code compliance, or permit approval.

This report does not determine or verify design loads; wind, snow, rain, flood, or seismic requirements; soil or site conditions; foundations or post embedment; truss or component engineering; member sizes, spans, connections, or bracing; fire and life-safety requirements; zoning; utilities; mechanical, electrical, plumbing, or HVAC systems; accessibility; energy-code compliance; or any other project-specific legal or code requirement.

Before ordering materials, applying for a permit, or beginning construction, the owner, customer, contractor, and suppliers are responsible for independently verifying all dimensions, quantities, specifications, opening locations, field conditions, product requirements, and applicable codes. Obtain all required approvals and any structural design or sealed drawings from a properly licensed design professional and the authority having jurisdiction. Supplier-engineered components must be reviewed and installed according to their approved drawings and instructions.

This report is an estimating aid only and must not be relied upon as a substitute for professional design, engineering judgment, permit approval, manufacturer instructions, or field verification. Quantities and specifications may change after engineering, supplier review, code review, or site verification. To the fullest extent permitted by applicable law, BUILT makes no warranty that this report is complete, structurally adequate, code compliant, fit for a particular construction purpose, or acceptable for permitting, and is not responsible for errors or losses resulting from inaccurate or incomplete customer information, unverified conditions, substitutions, later changes, or use of this report beyond its stated estimating purpose.

### RECIPIENT ACKNOWLEDGMENT

By ordering, accepting, or using this report, the recipient acknowledges these limitations and accepts responsibility for obtaining all required professional review, engineering, field verification, permits, and approvals before construction.



SAMPLE

# SAMPLE: 40x80 STEPPED SHOP HOUSE WITH WRAPAROUND PORCH

**PRELIMINARY FRAMING DRAWINGS - POST-FRAME BUILDING - FOR ENGINEER REVIEW**

## Project information

| | |
|---|---|
| Owner | Sample Customer |
| Site address | - |
| Jurisdiction | - |
| Builder / contractor | Jesse McCoun - BUILT |
| Job number | SAMPLE |
| Use / occupancy | BY ENGINEER OF RECORD |
| Prepared by | BUILT - Jesse McCoun, (330) 500-6701, jesse.built@outlook.com |
| Date / revision | 2026-10-16 - rev. 0 |

## Building data

| | |
|---|---|
| Building size | 40'-0" wide x 80'-0" long (outside of posts) |
| Eave height | 10'-0" (grade to truss bearing); rear section 14'-0" |
| Roof | 4/12 gable, ridge 16'-8" at bearing line; Metal roof, Charcoal |
| Overhangs | 12" eaves, 12" gables |
| Area | 3,200 sq ft enclosed |
| Posts | Perma-Column post-frame columns; 8'-0" o.c. sidewalls, 8'-0" o.c. gables; 38 posts |
| Trusses | 21 engineered trusses @ 4'-0" o.c., 40'-0" span |
| Wall framing | 2x4 exterior wall girts @ 24" o.c.; pressure-treated 2x6 baseboards |
| Roof framing | 2x4 roof purlins @ 24" o.c.; (2) 2x12 truss carriers |
| Walls / trim | Metal siding, White; trim White |
| Wind bracing | None |
| Vapor barrier | Single bubble white/foil, roof only |
| Insulation / liner | None |
| Soffit | None |

## Design criteria

| | |
|---|---|
| Building code | BY ENGINEER OF RECORD |
| Risk category | BY ENGINEER OF RECORD |
| Ground snow load Pg | BY ENGINEER OF RECORD |
| Flat roof snow load Pf | BY ENGINEER OF RECORD |
| Snow factors | BY ENGINEER OF RECORD |
| Roof live load (TCLL) | BY ENGINEER OF RECORD |
| Top chord dead load | BY ENGINEER OF RECORD |
| Bottom chord dead load | BY ENGINEER OF RECORD |
| Bottom chord live load | BY ENGINEER OF RECORD |
| Wind speed Vult | BY ENGINEER OF RECORD |
| Wind exposure | BY ENGINEER OF RECORD |
| Seismic design category | BY ENGINEER OF RECORD |
| Soil bearing capacity | BY ENGINEER OF RECORD |
| Frost depth / footing depth | BY ENGINEER OF RECORD |
| Concrete | BY ENGINEER OF RECORD |
| Post hole diameter | 18 in (BUILT profile) |
| Footing | BY ENGINEER OF RECORD |
| Footing pad thickness | BY ENGINEER OF RECORD |
| Floor | BY ENGINEER OF RECORD |
| Truss supplier / job no. | BY ENGINEER OF RECORD |
| Truss uplift per bearing | BY ENGINEER OF RECORD |
| Engineer of record | BY ENGINEER OF RECORD |
| Post embedment | 4'-0" below grade (as ordered) |

- 22 design criteria still read "BY ENGINEER OF RECORD". The engineer of record sets or confirms every design value before sealing.

## Sheet index


| Sheet | Title |
|---|---|
| G-001 | Cover sheet, design criteria and notes |
| S-101 | Post and foundation plan |
| A-101 | Floor plan and opening schedule |
| S-102 | Roof framing plan |
| A-201 | Exterior elevations - front and rear |
| A-202 | Exterior elevations - left and right |
| S-201 | Building section |
| S-301 | Wall framing - front and rear |
| S-302 | Wall framing - left and right |
| S-501 | Typical details |
| S-601 | Schedules |
| G-002 | Legal notice |


## GENERAL NOTES

1. These drawings are generated from the BUILT material takeoff for this project: every post, girt, header, truss, purlin and attached-roof member shown is the one ordered. They are submitted for review, design and sealing by a licensed design professional (engineer of record) and are not for construction until sealed.
2. The engineer of record determines design loads, member sizes, post embedment and footing size, uplift anchorage, connections, bracing and diaphragm design. Items marked "BY ENGINEER" are not decided by these drawings.
3. Trusses: 21 pre-engineered trusses by the truss supplier (BY ENGINEER OF RECORD). The supplier's sealed truss drawings govern truss design, bearing, plating, bracing and permanent restraint. Gable-end trusses: Supplier-framed gable-end trusses.
4. Posts: Perma-Column post-frame columns, ground-contact treated, set in 18" dia. holes 4'-0" below grade on precast post bearing pad. Backfill: compacted excavated soil unless project requires otherwise.
5. Truss carriers: (2) 2x12 each sidewall; splices bear on posts. Overhead-door headers: (2) 2x12 with 1'-0" bearing each end. Carrier, header and truss connections: by engineer of record.
6. Wall girts 2x4 exterior wall girts @ 24" o.c.; skirt/base boards pressure-treated 2x6 baseboards; roof purlins 2x4 roof purlins @ 24" o.c.
7. Roof bracing (as ordered): Two longitudinal bottom-chord continuous lateral-restraint rows plus four corner-to-center diagonal bottom-chord braces; final layout and connections require truss-supplier verification.
8. Wood in contact with the ground or concrete shall be preservative treated for ground contact. Fasteners and connectors in contact with treated wood shall be as required by the code and the connector manufacturer.
9. Metal panels: 36-inch exposed-fastener panel, gauge per supplier; fastening pattern per panel manufacturer. Roof Metal roof, Charcoal; walls Metal siding, White.
10. Dimensions are to the outside face of the posts (building line) unless noted; post spacing is to post centers. Heights are from finished grade. Building is 40'-0" x 80'-0".
11. Door and window rough openings shall be verified with the manufacturer before framing. The contractor verifies all dimensions and site conditions before ordering or building.


**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**COVER SHEET, DESIGN CRITERIA AND NOTES**

DATE
2026-10-16

REVISION
0

DRAWN BY
BUILT

JOB NO.
SAMPLE

SCALE
NONE

PAPER
Letter 8 1/2" x 11"


**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**

ENGINEER OF RECORD - SEAL / SIGNATURE




SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

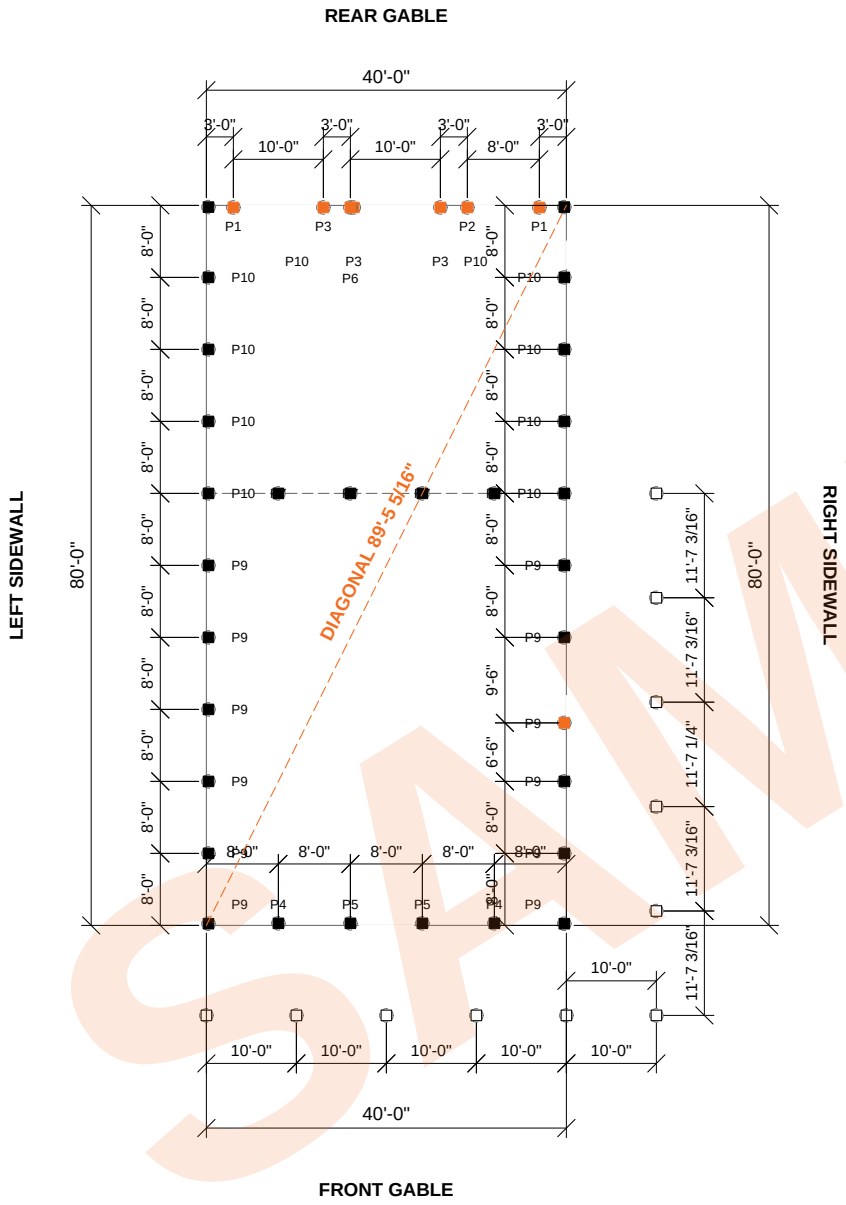


1 S-101 **POST AND FOUNDATION PLAN**

SCALE: 3/64" = 1'-0"

0 40'

## Post schedule

| Tag | Post | Qty | Length |
|---|---|---|---|
| P1 | Perma-Column post-frame columns - additional opening columns | 2 | 22'-0" |
| P2 | Perma-Column post-frame columns - additional opening columns | 1 | 24'-0" |
| P3 | Perma-Column post-frame columns - additional opening columns | 3 | 26'-0" |
| P4 | Perma-Column post-frame columns - gable-interior columns | 2 | 20'-0" |
| P5 | Perma-Column post-frame columns - gable-interior columns | 2 | 22'-0" |
| P6 | Perma-Column post-frame columns - gable-interior columns | 1 | 26'-0" |
| P7 | Perma-Column post-frame columns - living-section back-gable interior columns | 4 | 20'-0" |
| P8 | Perma-Column post-frame columns - living-section back-gable man-door support column | 1 | 20'-0" |
| P9 | Perma-Column post-frame columns - sidewall/corner columns | 12 | 16'-0" |
| P10 | Perma-Column post-frame columns - sidewall/corner columns | 10 | 20'-0" |
| LP | Attached-roof posts (open square) | 11 | see S-601 |

- Post framing a doorway (door jamb)
- Wall or corner post
- Post hole (dashed)

## FOUNDATION NOTES

1. Post holes: 18 in dia.; posts embedded 4'-0" below grade.
2. Footing: Precast post bearing pad. Concrete: BY ENGINEER OF RECORD.
3. Bottom of hole / frost depth: BY ENGINEER OF RECORD. Soil bearing: BY ENGINEER OF RECORD.
4. Backfill: Compacted excavated soil unless project requires otherwise.
5. Uplift anchorage of posts (collar, cleats or anchors): by engineer of record.
6. Square the layout so both corner-to-corner diagonals match the dimension shown.
7. Spacing is from the outside corner of the building line to post centers; corner posts sit inside the corner.

**BUILT**
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
**Sample: 40x80 stepped shop house with wraparound porch**

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
**POST AND FOUNDATION PLAN**

DATE 2026-10-16
REVISION 0
DRAWN BY BUILT
JOB NO. SAMPLE
SCALE AS NOTED
PAPER Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 2 OF 13

**S-101**

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

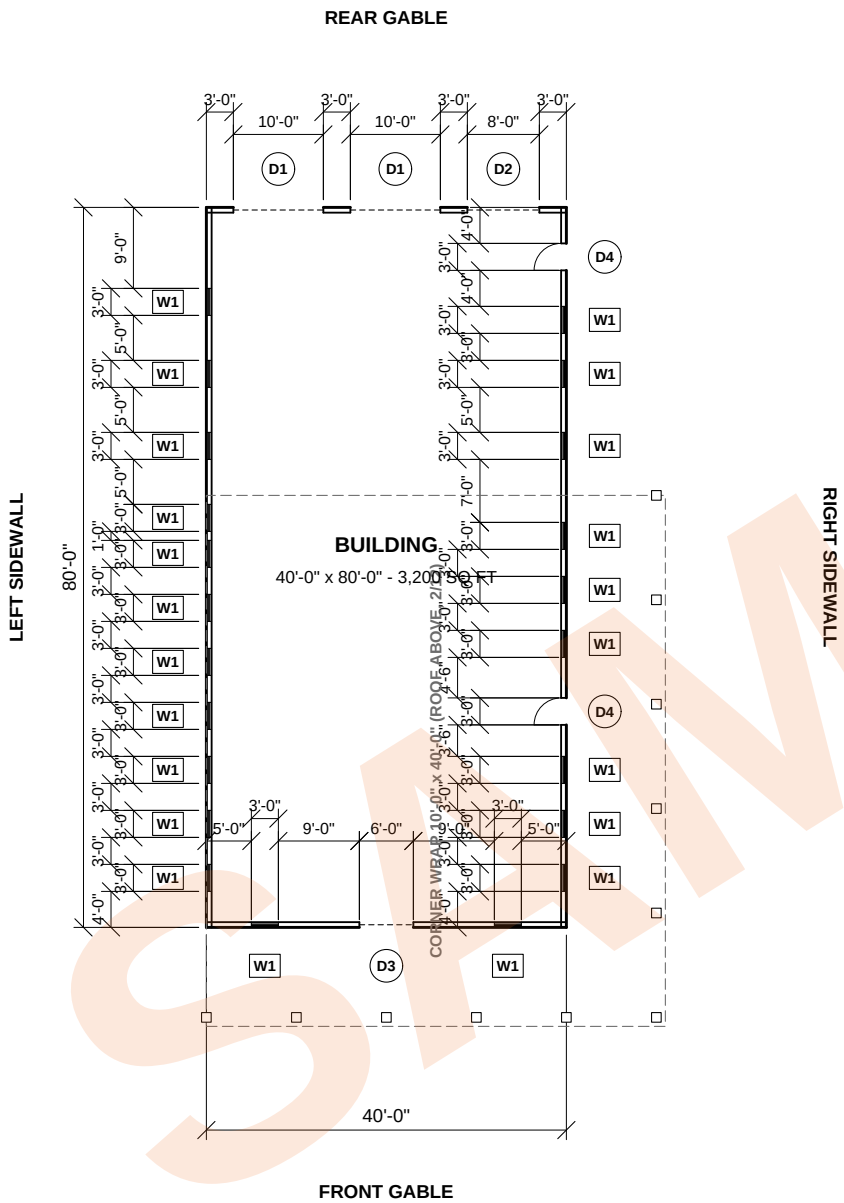


1 A-101 **FLOOR PLAN**

SCALE: 3/64" = 1'-0"

0 40'

## Opening schedule

| Mark | Type | Size (W x H) | Qty | Wall(s) |
|---|---|---|---|---|
| D1 | Overhead door | 10'-0" x 12'-0" | 2 | Rear |
| D2 | Overhead door | 8'-0" x 10'-0" | 1 | Rear |
| D3 | Sliding door | 6'-0" x 6'-8" | 1 | Front |
| D4 | Man door | 3'-0" x 6'-8" | 2 | Right |
| W1 | Window | 3'-0" x 4'-0" | 22 | Left, Right, Front |

## Opening locations

| Mark | Wall | From corner | Sill / head |
|---|---|---|---|
| D1 | Rear | 3'-0" from left sidewall | 0'-0" / 12'-0" |
| D1 | Rear | 16'-0" from left sidewall | 0'-0" / 12'-0" |
| D2 | Rear | 29'-0" from left sidewall | 0'-0" / 10'-0" |
| D3 | Front | 17'-0" from left sidewall | 0'-0" / 6'-8" |
| D4 | Right | 22'-6" from front | 0'-0" / 6'-8" |
| D4 | Right | 73'-0" from front | 0'-0" / 6'-8" |
| W1 | Left | 4'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 10'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 16'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 22'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 28'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 34'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 40'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 44'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 52'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 60'-0" from front | 3'-0" / 7'-0" |
| W1 | Left | 68'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 4'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 10'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 16'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 30'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 36'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 42'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 52'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 60'-0" from front | 3'-0" / 7'-0" |
| W1 | Right | 66'-0" from front | 3'-0" / 7'-0" |
| W1 | Front | 5'-0" from left sidewall | 3'-0" / 7'-0" |
| W1 | Front | 32'-0" from left sidewall | 3'-0" / 7'-0" |

**BUILT**
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
**Sample: 40x80 stepped shop house with wraparound porch**

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
**FLOOR PLAN AND OPENING SCHEDULE**

DATE 2026-10-16
REVISION 0
DRAWN BY BUILT
JOB NO. SAMPLE
SCALE AS NOTED
PAPER Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 3 OF 13

**A-101**

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

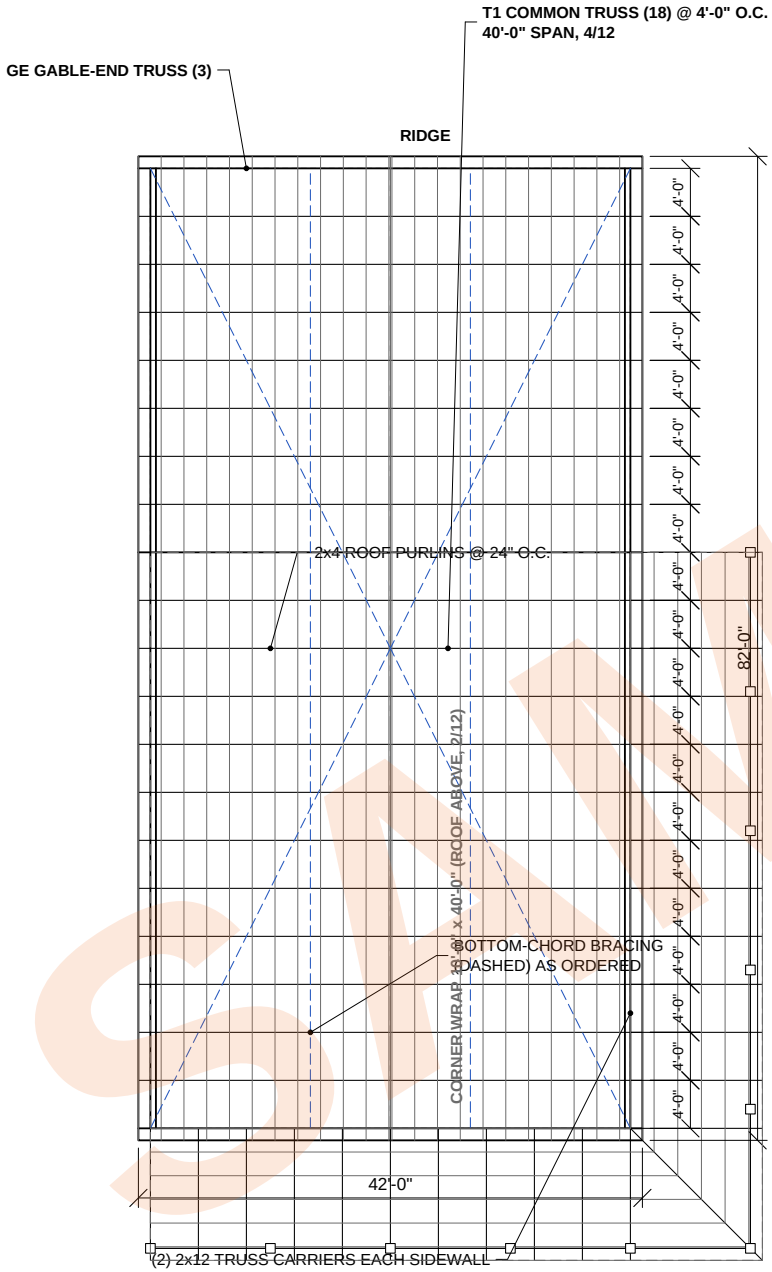


1 S-102 **ROOF FRAMING PLAN**

SCALE: 1/16" = 1'-0" 0 16'

## Truss schedule

| Mark | Truss | Qty | Span |
|---|---|---|---|
| T1 | Common, 4/12, 12" tails | 18 | 40'-0" |
| GE | Gable-end (each end wall) | 3 | 40'-0" |

## Truss design loads

| | |
|---|---|
| Ground snow Pg | BY ENGINEER OF RECORD |
| Roof snow Pf | BY ENGINEER OF RECORD |
| TCLL / TCDL | BY ENGINEER OF RECORD / BY ENGINEER OF RECORD |
| BCLL / BCDL | BY ENGINEER OF RECORD / BY ENGINEER OF RECORD |
| Wind | BY ENGINEER OF RECORD, exp. BY ENGINEER OF RECORD |
| Uplift / bearing | BY ENGINEER OF RECORD |

## ROOF FRAMING NOTES

1. Trusses by BY ENGINEER OF RECORD; the supplier's sealed truss drawings govern. Spacing 4'-0" o.c.
2. Purlins: 2x4 roof purlins @ 24" o.c., face-mounted; 26 rows. Purlin-to-truss connection per truss supplier / engineer.
3. Truss carriers: (2) 2x12 on each sidewall, one ply each face of the posts; splices bear on posts.
4. Bracing as ordered: Two longitudinal bottom-chord continuous lateral-restraint rows plus four corner-to-center diagonal bottom-chord braces; final layout and connections require truss-supplier verification. Permanent truss restraint per the truss drawings and BCSI.
5. Truss-to-carrier, carrier-to-post and purlin connections: by engineer of record.
6. Attached roof 1: corner-wrap, 10'-0" x 40'-0", 2/12, 2x8 rafters @ 4'-0" o.c., purlins @ 24" o.c., posts @ 12'-0" o.c.


**BUILT**
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT
**Sample: 40x80 stepped shop house with wraparound porch**

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
**ROOF FRAMING PLAN**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |
| DRAWN BY | JOB NO. |
| BUILT | SAMPLE |
| SCALE | PAPER |
| 1/16"=1' | Letter 8 1/2" x 11" |

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 4 OF 13

**S-102**


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

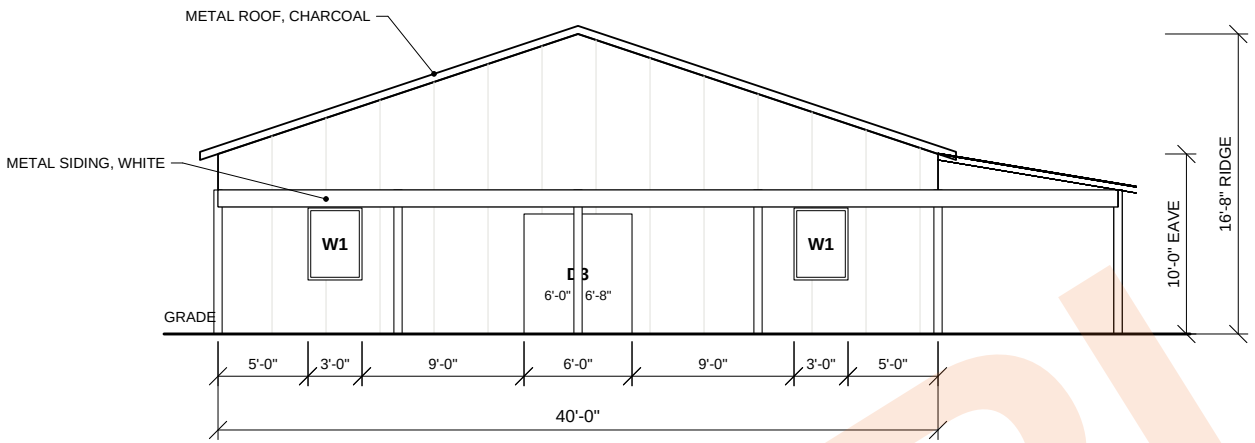


1 A-201 **FRONT ELEVATION**

SCALE: 3/32" = 1'-0" 0 16'

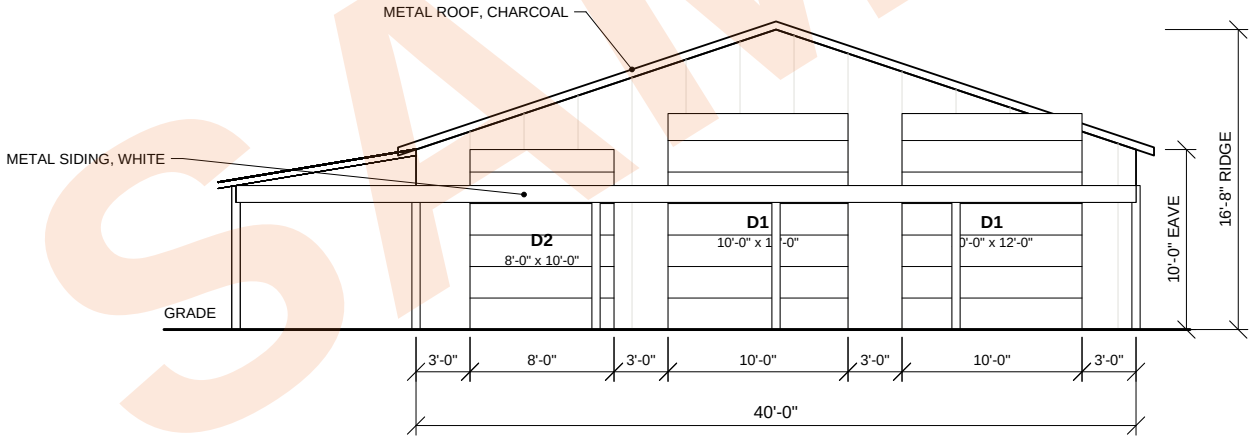


2 A-201 **REAR ELEVATION**

SCALE: 3/32" = 1'-0" 0 16'


**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**EXTERIOR ELEVATIONS - FRONT AND REAR**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |
| DRAWN BY | JOB NO. |
| BUILT | SAMPLE |
| SCALE | PAPER |
| 3/32"=1' | Letter 8 1/2" x 11" |

**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 5 OF 13

**A-201**



SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

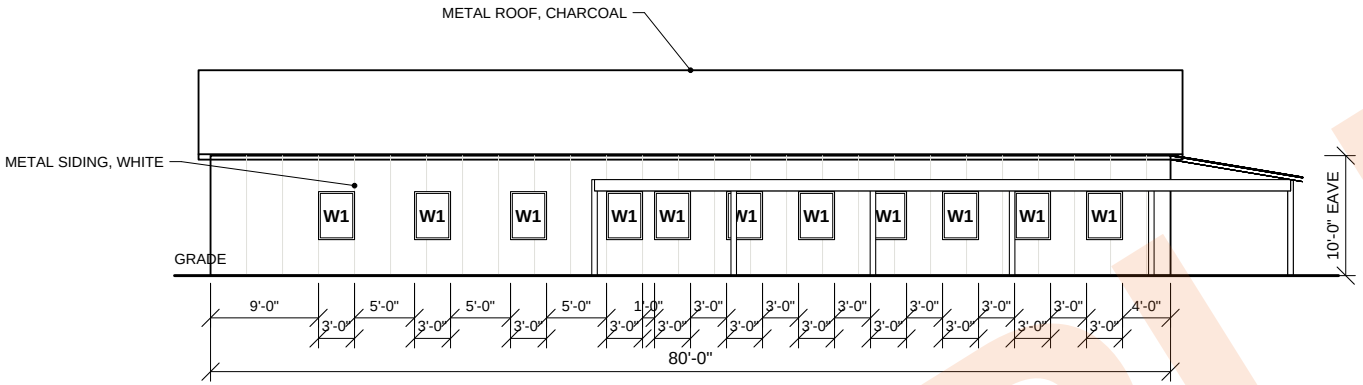


1 A-202 **LEFT ELEVATION**

SCALE: 1/16" = 1'-0"

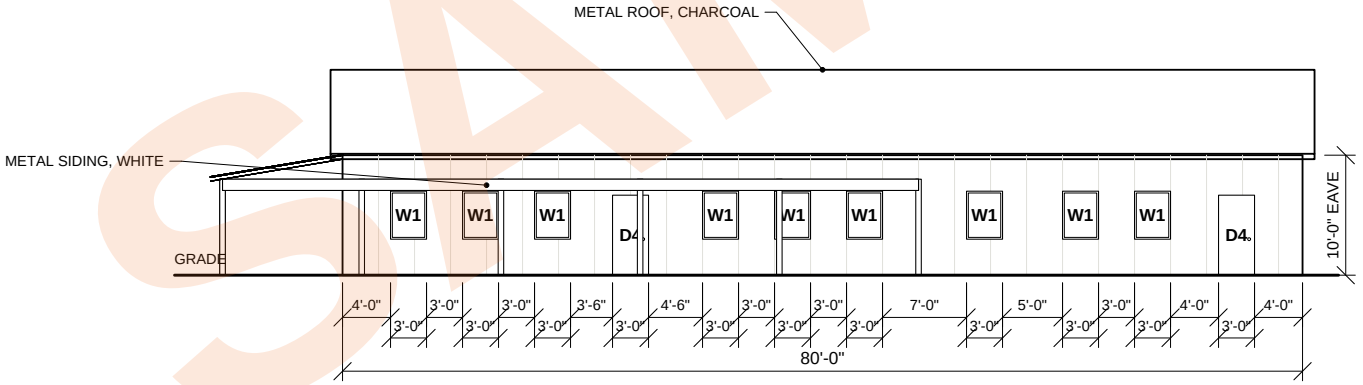


2 A-202 **RIGHT ELEVATION**

SCALE: 1/16" = 1'-0"

SAMPLE

**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**EXTERIOR ELEVATIONS - LEFT AND RIGHT**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |

| DRAWN BY | JOB NO. |
|---|---|
| BUILT | SAMPLE |

| SCALE | PAPER |
|---|---|
| 1/16"=1' | Letter 8 1/2" x 11" |


**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 6 OF 13

**A-202**

SAMPLE ONLY - BUILT - not for construction or ordering

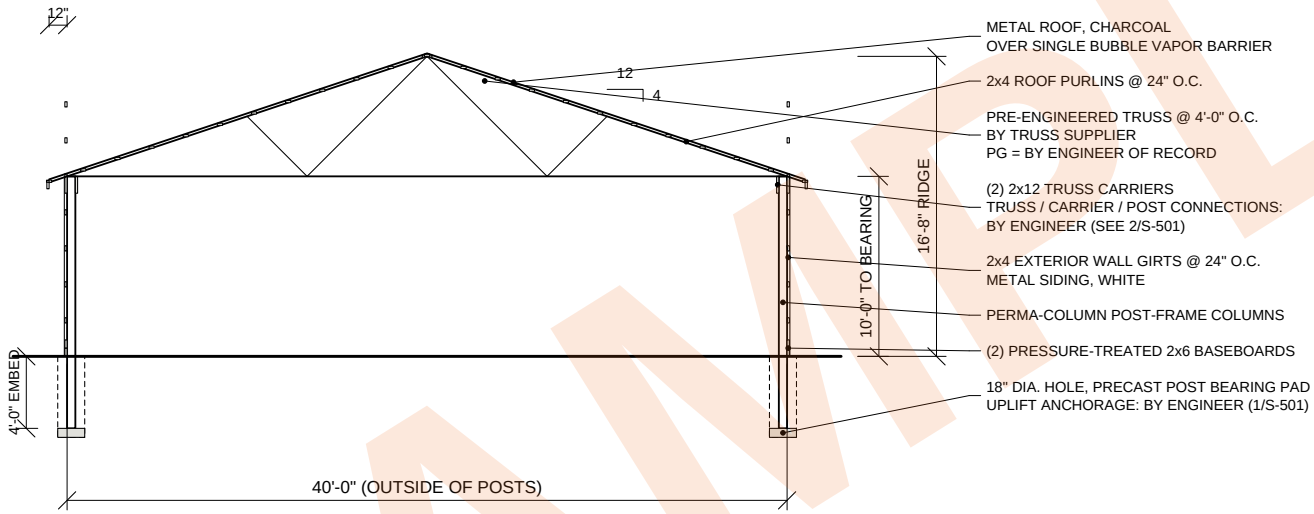


HEIGHTS ARE FROM GRADE TO THE TOP OF THE CARRIERS (TRUSS BEARING).

1 S-201 **BUILDING CROSS SECTION**

SCALE: 3/32" = 1'-0"  0  16'


**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**BUILDING SECTION**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |
| DRAWN BY | JOB NO. |
| BUILT | SAMPLE |
| SCALE | PAPER |
| 3/32"=1' | Letter 8 1/2" x 11" |

**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 7 OF 13

**S-201**



SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

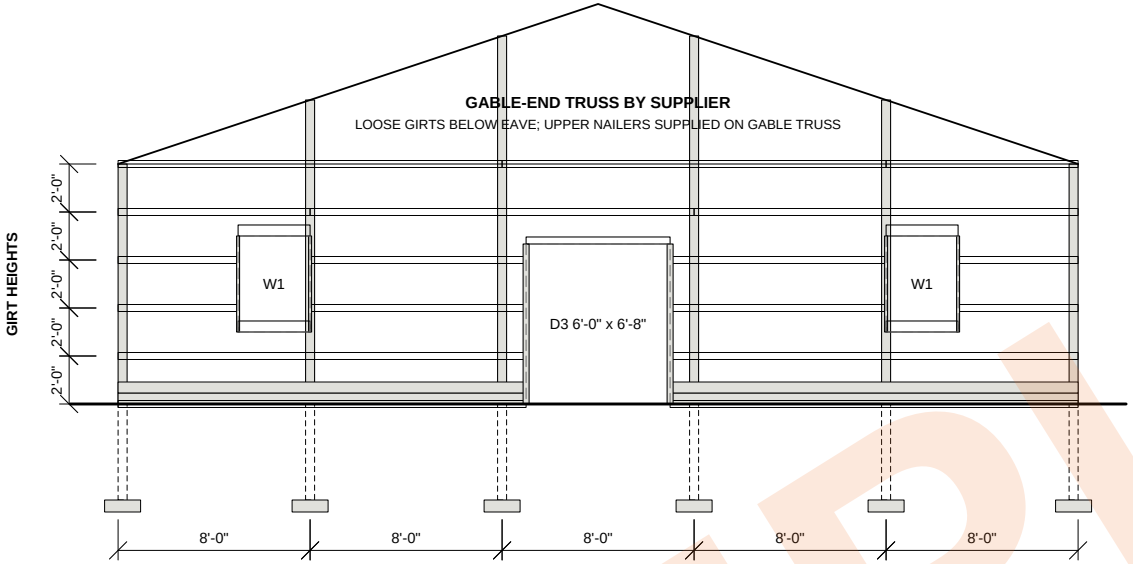


1 S-301 **FRONT WALL FRAMING**

SCALE: 1/8" = 1'-0"

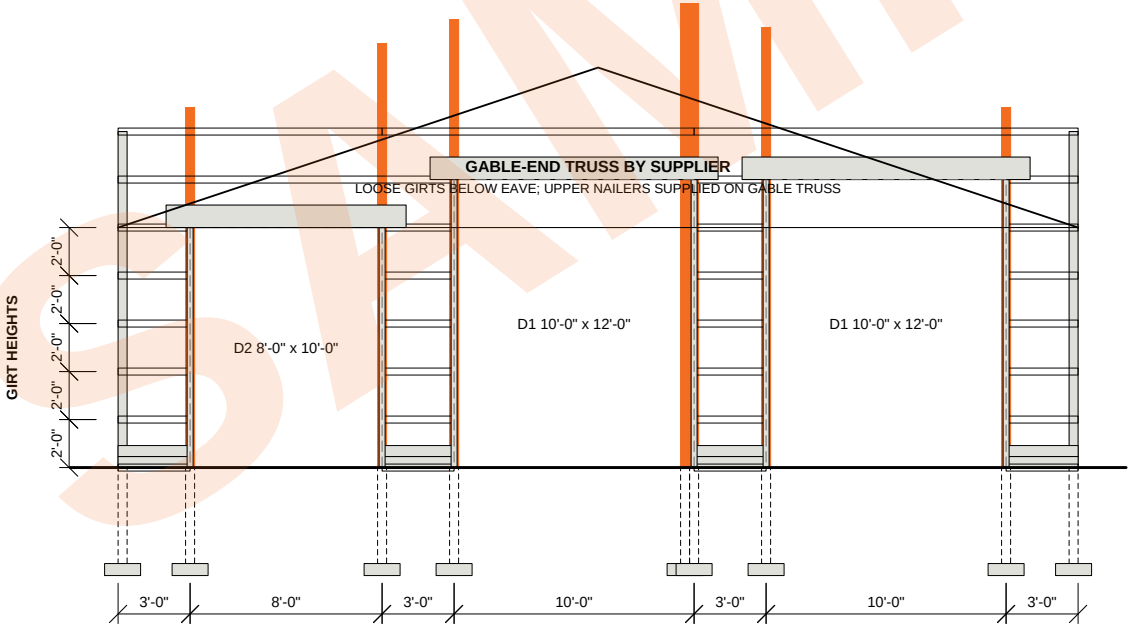


2 S-301 **REAR WALL FRAMING**

SCALE: 1/8" = 1'-0"


**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**WALL FRAMING - FRONT AND REAR**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |

| DRAWN BY | JOB NO. |
|---|---|
| BUILT | SAMPLE |

| SCALE | PAPER |
|---|---|
| 1/8"=1' | Letter 8 1/2" x 11" |

**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 8 OF 13

# S-301



SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

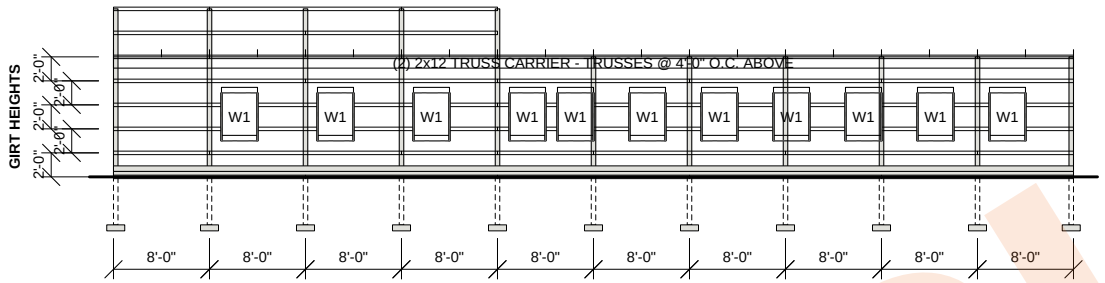


1 S-302 **LEFT WALL FRAMING**

SCALE: 1/16" = 1'-0"  0  16'

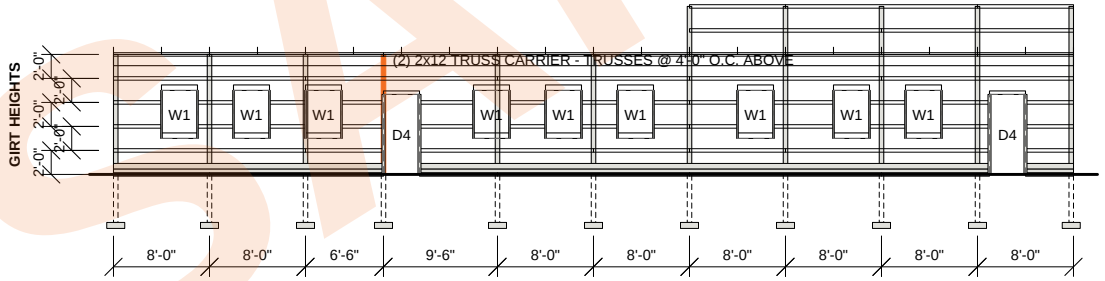


2 S-302 **RIGHT WALL FRAMING**

SCALE: 1/16" = 1'-0"  0  16'

**BUILT**
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
**Sample: 40x80 stepped shop house with wraparound porch**

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
**WALL FRAMING - LEFT AND RIGHT**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |
| DRAWN BY | JOB NO. |
| BUILT | SAMPLE |
| SCALE | PAPER |
| 1/16"=1' | Letter 8 1/2" x 11" |

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 9 OF 13

**S-302**

SAMPLE


SAMPLE ONLY - BUILT - not for construction or ordering

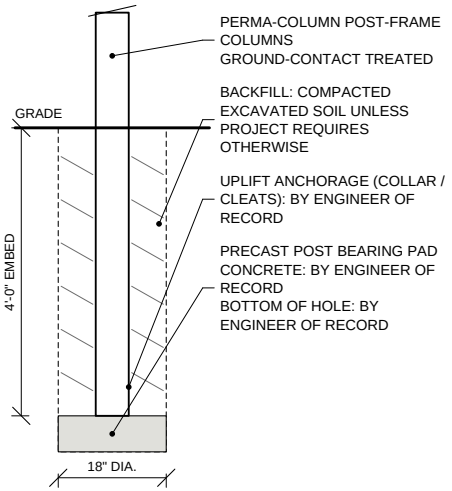


## 1 POST FOOTING

S-501

SCALE: 3/8" = 1'-0"

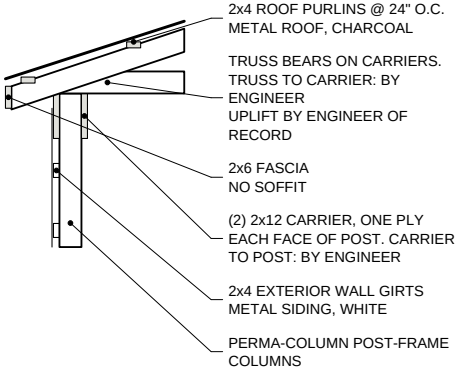



## 2 EAVE AND TRUSS BEARING

S-501

SCALE: 1/4" = 1'-0"

0 4'

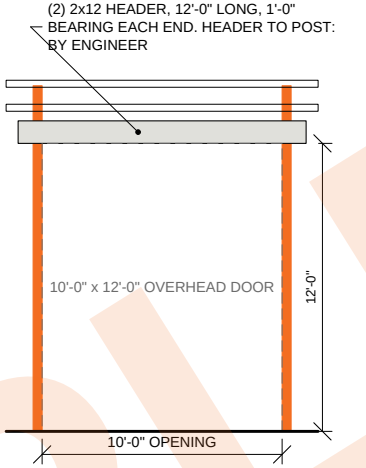



## 3 OVERHEAD DOOR HEADER

S-501

SCALE: 1/8" = 1'-0"

0 8'

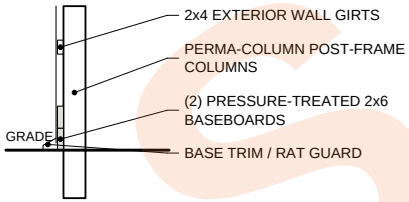



## 4 WALL BASE

S-501

SCALE: 1/4" = 1'-0"

0 4'

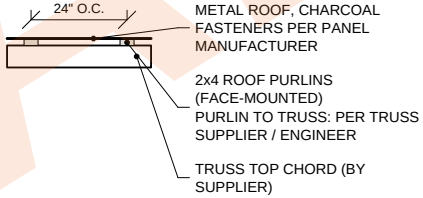



## 5 PURLIN AT TRUSS

S-501

SCALE: 1/4" = 1'-0"

0 4'

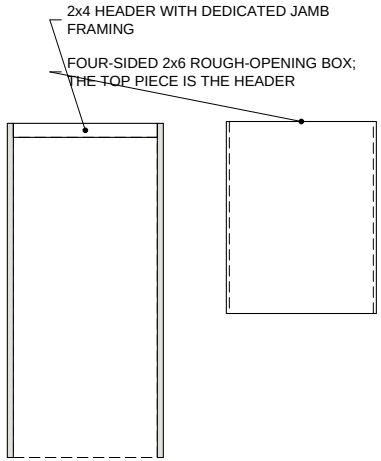


## 6 MAN DOOR AND WINDOW FRAMING

S-501

SCALE: 1/4" = 1'-0"

0 4'


**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**TYPICAL DETAILS**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |
| DRAWN BY | JOB NO. |
| BUILT | SAMPLE |
| SCALE | PAPER |
| AS NOTED | Letter 8 1/2" x 11" |

**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 10 OF 13

# S-501


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## Column schedule

| Columns | Qty | Length | Note |
|---|---|---|---|
| Sidewall/corner columns | 12 | 16'-0" | stepped-height sidewalls; includes 2' stock allowance |
| Sidewall/corner columns | 10 | 20'-0" | stepped-height sidewalls; includes 2' stock allowance |
| Gable-interior columns | 2 | 20'-0" | symmetrical roof-height stock; includes 2' stock allowance |
| Gable-interior columns | 2 | 22'-0" | symmetrical roof-height stock; includes 2' stock allowance |
| Gable-interior columns | 1 | 26'-0" | symmetrical roof-height stock; includes 2' stock allowance |
| Living-section back-gable interior columns | 4 | 20'-0" | 8' maximum spacing; columns continue to 14' attached-section eave; sidewall edge columns shared; no additional lower gable truss |
| Living-section back-gable man-door support column | 1 | 20'-0" | Standard man-door method; column continues to 14' attached-section eave; exact jamb relationship requires field confirmation |
| Additional opening columns | 2 | 22'-0" | jamb posts of a clear gable bay; roof-height stock; includes 2' stock allowance |
| Additional opening columns | 1 | 24'-0" | jamb posts of a clear gable bay; roof-height stock; includes 2' stock allowance |
| Additional opening columns | 3 | 26'-0" | jamb posts of a clear gable bay; roof-height stock; includes 2' stock allowance |

## Header schedule

| Mark | Opening | Header | Length |
|---|---|---|---|
| D1 | 10'-0" x 12'-0" | (2) 2x12 | 12'-0" |
| D2 | 8'-0" x 10'-0" | (2) 2x12 | 10'-0" |

## Opening schedule

| Mark | Type | Size | Wall |
|---|---|---|---|
| D1 | Overhead door | 10'-0" x 12'-0" | Rear |
| D1 | Overhead door | 10'-0" x 12'-0" | Rear |
| D2 | Overhead door | 8'-0" x 10'-0" | Rear |

## Opening schedule (cont.)

| Mark | Type | Size | Wall |
|---|---|---|---|
| D3 | Sliding door | 6'-0" x 6'-8" | Front |
| D4 | Man door | 3'-0" x 6'-8" | Right |
| D4 | Man door | 3'-0" x 6'-8" | Right |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Left |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Right |
| W1 | Window | 3'-0" x 4'-0" | Front |
| W1 | Window | 3'-0" x 4'-0" | Front |

## Framing lumber (as ordered)

| Item | Size | Qty | Length |
|---|---|---|---|
| Sidewall/corner columns | Perma-Column post-frame columns | 12 | 16' |
| Sidewall/corner columns | Perma-Column post-frame columns | 10 | 20' |
| Gable-interior columns | Perma-Column post-frame columns | 2 | 20' |
| Gable-interior columns | Perma-Column post-frame columns | 2 | 22' |

## Framing lumber (as ordered) (cont.)

| Item | Size | Qty | Length |
|---|---|---|---|
| Gable-interior columns | Perma-Column post-frame columns | 1 | 26' |
| Living-section back-gable interior columns | Perma-Column post-frame columns | 4 | 20' |
| Living-section back-gable man-door support column | Perma-Column post-frame columns | 1 | 20' |
| Additional opening columns | Perma-Column post-frame columns | 2 | 22' |
| Additional opening columns | Perma-Column post-frame columns | 1 | 24' |
| Additional opening columns | Perma-Column post-frame columns | 3 | 26' |
| Perma-Column foundation units | Perma-Column unit | 49 | - |
| Living-section back-gable passage-door header | 2x4 | Included in 2x4 door header stock | 4' |
| Engineered common trusses | 40' span - 4/12 | 18 | Engineered |
| Engineered gable-end trusses | 40' span - 4/12 | 3 | Engineered |
| Sidewall truss carriers | 2x12 | 20 | 16' |
| Treated baseboards / skirt boards | 2x6 PT | 30 | 16' |
| Left sidewall girts | 2x4 | 55 | 16' |
| Right sidewall girts | 2x4 | 2 | 20' |
| Right sidewall girts | 2x4 | 55 | 16' |
| Front gable rectangular-wall girts | 2x4 | 4 | 20' |
| Front gable rectangular-wall girts | 2x4 | 14 | 16' |
| Rear gable rectangular-wall girts | 2x4 | 30 | 16' |
| Stepped-height transition-wall girts | 2x4 | 6 | 20' |
| Living-section back-gable wall girts | 2x4 | 8 | 20' |
| Living-section back-gable wall girts | 2x4 | 6 | 16' |
| Wall-girt waste / spare allowance | 2x4 | 6 | 16' |


**BUILT**
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT
**Sample: 40x80 stepped shop house with wraparound porch**

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
**SCHEDULES (1 OF 2)**

DATE
2026-10-16

REVISION
0

DRAWN BY
BUILT

JOB NO.
SAMPLE

SCALE
NONE

PAPER
Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 11 OF 13

**S-601**


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

### Framing lumber (as ordered) (cont.)

| Item | Size | Qty | Length |
|---|---|---|---|
| MAIN-ROOF PURLINS - BOTH ROOF SLOPES | 2x4 | 144 | 16' |
| Bottom-chord continuous lateral restraint (BCLR / rat runs) | 2x4 | 10 | 16' |
| Bottom-chord diagonal bracing | 2x4 | 12 | 16' |
| Eave and rake fascia | 2x6 | 17 | 16' |
| Window rough-opening box framing | 2x6 | 21 | 16' |
| Garage/sliding/man-door jamb and support framing | Profile verification | 8 | 16' |
| Man, sliding and passage door header stock | 2x4 | 1 | 16' |
| Overhead-door header #1 - Rear gable | 2x12 | 2 | 12' |
| Overhead-door header #2 - Rear gable | 2x12 | 2 | 12' |
| Overhead-door header #3 - Rear gable | 2x12 | 2 | 10' |
| Attached roof #1 outside columns | Perma-Column post-frame columns | 11 | 16' |
| Attached roof #1 inside attachment header / ledger | 2x12 | 4 | 24' |
| Attached roof #1 outside post-line header / beam | 2x12 | 9 | 24' |
| Attached roof #1 common and jack rafters | 2x8 | 24 | 12' |
| Attached roof #1 structural hip rafter | 2x8 | 1 | 16' |
| Attached roof #1 roof purlins | 2x4 | 44 | 16' |
| Attached roof #1 fascia | 2x6 | 7 | 16' |

### Attached roof 1 (corner-wrap)

| Size | 10'-0" x 40'-0", 2/12 |
|---|---|
| Posts | 11 @ 12'-0" o.c., outer eave 8'-0" |
| Rafters | 24 2x8 @ 4'-0" o.c., 11'-1 13/16" (12' stock) |
| Beam / ledger | 216 LF beam, 88 LF ledger (2x12) |
| Purlins | 697.18 LF @ 24" o.c. |
| Roof area | 1104 sq ft |


**BUILT**
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT
**Sample: 40x80 stepped shop house with wraparound porch**

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
**SCHEDULES (2 OF 2)**

DATE
2026-10-16

REVISION
0

DRAWN BY
BUILT

JOB NO.
SAMPLE

SCALE
NONE

PAPER
Letter 8 1/2" x 11"

**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 12 OF 13

**S-602**


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

## IMPORTANT LEGAL NOTICE AND LIMITATIONS

### MATERIAL TAKEOFF ONLY - NOT ENGINEERING OR CONSTRUCTION DRAWINGS

This report is provided solely as a preliminary material-quantity estimate based on information supplied by the customer and the calculator settings shown in the report. Jesse McCoun and BUILT are not licensed professional engineers or architects. This report is not an engineered design, architectural or construction drawing, permit drawing, structural analysis, certification, or representation of structural adequacy, code compliance, or permit approval.

This report does not determine or verify design loads; wind, snow, rain, flood, or seismic requirements; soil or site conditions; foundations or post embedment; truss or component engineering; member sizes, spans, connections, or bracing; fire and life-safety requirements; zoning; utilities; mechanical, electrical, plumbing, or HVAC systems; accessibility; energy-code compliance; or any other project-specific legal or code requirement.

Before ordering materials, applying for a permit, or beginning construction, the owner, customer, contractor, and suppliers are responsible for independently verifying all dimensions, quantities, specifications, opening locations, field conditions, product requirements, and applicable codes. Obtain all required approvals and any structural design or sealed drawings from a properly licensed design professional and the authority having jurisdiction. Supplier-engineered components must be reviewed and installed according to their approved drawings and instructions.

This report is an estimating aid only and must not be relied upon as a substitute for professional design, engineering judgment, permit approval, manufacturer instructions, or field verification. Quantities and specifications may change after engineering, supplier review, code review, or site verification. To the fullest extent permitted by applicable law, BUILT makes no warranty that this report is complete, structurally adequate, code compliant, fit for a particular construction purpose, or acceptable for permitting, and is not responsible for errors or losses resulting from inaccurate or incomplete customer information, unverified conditions, substitutions, later changes, or use of this report beyond its stated estimating purpose.

### RECIPIENT ACKNOWLEDGMENT

By ordering, accepting, or using this report, the recipient acknowledges these limitations and accepts responsibility for obtaining all required professional review, engineering, field verification, permits, and approvals before construction.


**BUILT**

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com


PROJECT

**Sample: 40x80 stepped shop house with wraparound porch**

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

**LEGAL NOTICE**

| DATE | REVISION |
|---|---|
| 2026-10-16 | 0 |

| DRAWN BY | JOB NO. |
|---|---|
| BUILT | SAMPLE |

| SCALE | PAPER |
|---|---|
| NONE | Letter 8 1/2" x 11" |

**PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.**

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 13 OF 13

**G-002**


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering