SAMPLE: 40x80 STEPPED SHOP HOUSE WITH WRAPAROUND PORCH

PRELIMINARY FRAMING DRAWINGS - POST-FRAME BUILDING - FOR ENGINEER REVIEW

Project information

Owner	Sample Customer
Site address	-
Jurisdiction	-
Builder / contractor	Jesse McCoun - BUILT
Job number	SAMPLE
Use / occupancy	BY ENGINEER OF RECORD
Prepared by	BUILT - Jesse McCoun, (330) 500-6701, jesse.built@outlook.com
Date / revision	2026-10-16 - rev. 0

Building data

Building size	40'-0" wide x 80'-0" long (outside of posts)
Eave height	10'-0" (grade to truss bearing); rear section 14'-0"
Roof	4/12 gable, ridge 16'-8" at bearing line; Metal roof, Charcoal
Overhangs	12" eaves, 12" gables
Area	3,200 sq ft enclosed
Posts	Perma-Column post-frame columns; 8'-0" o.c. sidewalls, 8'-0" o.c. gables; 38 posts
Trusses	21 engineered trusses @ 4'-0" o.c., 40'-0" span
Wall framing	2x4 exterior wall girts @ 24" o.c.; pressure-treated 2x6 baseboards
Roof framing	2x4 roof purlins @ 24" o.c.; (2) 2x12 truss carriers
Walls / trim	Metal siding, White; trim White
Wind bracing	None
Vapor barrier	Single bubble white/foil, roof only
Insulation / liner	None
Soffit	None

Design criteria

Building code	BY ENGINEER OF RECORD
Risk category	BY ENGINEER OF RECORD
Ground snow load Pg	BY ENGINEER OF RECORD
Flat roof snow load Pf	BY ENGINEER OF RECORD
Snow factors	BY ENGINEER OF RECORD
Roof live load (TCLL)	BY ENGINEER OF RECORD
Top chord dead load	BY ENGINEER OF RECORD
Bottom chord dead load	BY ENGINEER OF RECORD
Bottom chord live load	BY ENGINEER OF RECORD
Wind speed Vult	BY ENGINEER OF RECORD
Wind exposure	BY ENGINEER OF RECORD
Seismic design category	BY ENGINEER OF RECORD
Soil bearing capacity	BY ENGINEER OF RECORD
Frost depth / footing depth	BY ENGINEER OF RECORD
Concrete	BY ENGINEER OF RECORD
Post hole diameter	18 in (BUILT profile)
Footing	BY ENGINEER OF RECORD
Footing pad thickness	BY ENGINEER OF RECORD
Floor	BY ENGINEER OF RECORD
Truss supplier / job no.	BY ENGINEER OF RECORD
Truss uplift per bearing	BY ENGINEER OF RECORD
Engineer of record	BY ENGINEER OF RECORD
Post embedment	4'-0" below grade (as ordered)

- 22 design criteria still read "BY ENGINEER OF RECORD". The engineer of record sets or confirms every design value before sealing.

Sheet index

Sheet	Title
G-001	Cover sheet, design criteria and notes
S-101	Post and foundation plan
A-101	Floor plan and opening schedule
S-102	Roof framing plan
A-201	Exterior elevations - front and rear
A-202	Exterior elevations - left and right
S-201	Building section
S-301	Wall framing - front and rear
S-302	Wall framing - left and right
S-501	Typical details
S-601	Schedules
G-002	Legal notice

GENERAL NOTES

1. These drawings are generated from the BUILT material takeoff for this project: every post, girt, header, truss, purlin and attached-roof member shown is the one ordered. They are submitted for review, design and sealing by a licensed design professional (engineer of record) and are not for construction until sealed.
2. The engineer of record determines design loads, member sizes, post embedment and footing size, uplift anchorage, connections, bracing and diaphragm design. Items marked "BY ENGINEER" are not decided by these drawings.
3. Trusses: 21 pre-engineered trusses by the truss supplier (BY ENGINEER OF RECORD). The supplier's sealed truss drawings govern truss design, bearing, plating, bracing and permanent restraint. Gable-end trusses: Supplier-framed gable-end trusses.
4. Posts: Perma-Column post-frame columns, ground-contact treated, set in 18" dia. holes 4'-0" below grade on precast post bearing pad. Backfill: compacted excavated soil unless project requires otherwise.
5. Truss carriers: (2) 2x12 each sidewall; splices bear on posts. Overhead-door headers: (2) 2x12 with 1'-0" bearing each end. Carrier, header and truss connections: by engineer of record.
6. Wall girts 2x4 exterior wall girts @ 24" o.c.; skirt/base boards pressure-treated 2x6 baseboards; roof purlins 2x4 roof purlins @ 24" o.c.
7. Roof bracing (as ordered): Two longitudinal bottom-chord continuous lateral-restraint rows plus four corner-to-center diagonal bottom-chord braces; final layout and connections require truss-supplier verification.
8. Wood in contact with the ground or concrete shall be preservative treated for ground contact. Fasteners and connectors in contact with treated wood shall be as required by the code and the connector manufacturer.
9. Metal panels: 36-inch exposed-fastener panel, gauge per supplier; fastening pattern per panel manufacturer. Roof Metal roof, Charcoal; walls Metal siding, White.
10. Dimensions are to the outside face of the posts (building line) unless noted; post spacing is to post centers. Heights are from finished grade. Building is 40'-0" x 80'-0".
11. Door and window rough openings shall be verified with the manufacturer before framing. The contractor verifies all dimensions and site conditions before ordering or building.

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

COVER SHEET, DESIGN CRITERIA AND NOTES

DATE
2026-10-16

REVISION
0

DRAWN BY
BUILT

JOB NO.
SAMPLE

SCALE
NONE


PAPER
Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

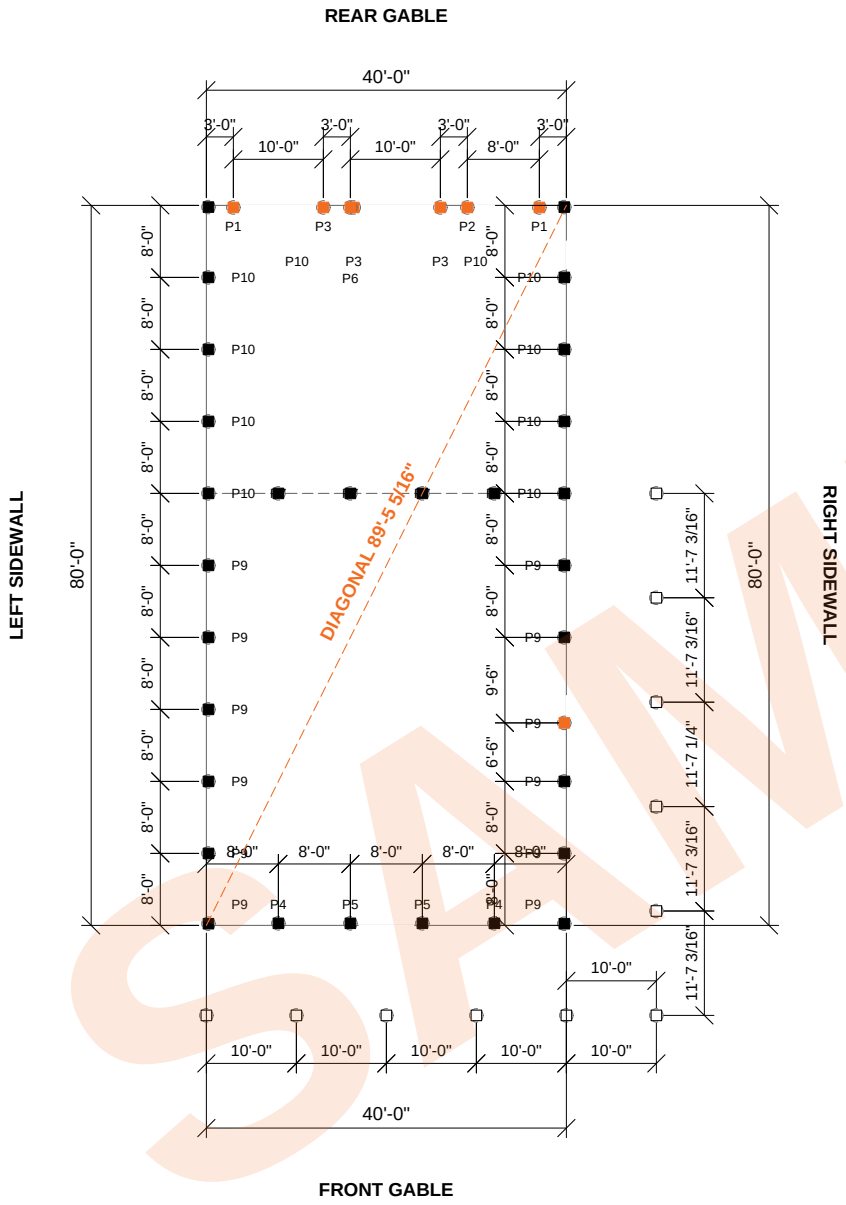

1 S-101 **POST AND FOUNDATION PLAN**

SCALE: 3/64" = 1'-0"

0 40'

Post schedule

Tag	Post	Qty	Length
P1	Perma-Column post-frame columns - additional opening columns	2	22'-0"
P2	Perma-Column post-frame columns - additional opening columns	1	24'-0"
P3	Perma-Column post-frame columns - additional opening columns	3	26'-0"
P4	Perma-Column post-frame columns - gable-interior columns	2	20'-0"
P5	Perma-Column post-frame columns - gable-interior columns	2	22'-0"
P6	Perma-Column post-frame columns - gable-interior columns	1	26'-0"
P7	Perma-Column post-frame columns - living-section back-gable interior columns	4	20'-0"
P8	Perma-Column post-frame columns - living-section back-gable man-door support column	1	20'-0"
P9	Perma-Column post-frame columns - sidewall/corner columns	12	16'-0"
P10	Perma-Column post-frame columns - sidewall/corner columns	10	20'-0"
LP	Attached-roof posts (open square)	11	see S-601

- Post framing a doorway (door jamb)
- Wall or corner post
- Post hole (dashed)

FOUNDATION NOTES

1. Post holes: 18 in dia.; posts embedded 4'-0" below grade.
2. Footing: Precast post bearing pad. Concrete: BY ENGINEER OF RECORD.
3. Bottom of hole / frost depth: BY ENGINEER OF RECORD. Soil bearing: BY ENGINEER OF RECORD.
4. Backfill: Compacted excavated soil unless project requires otherwise.
5. Uplift anchorage of posts (collar, cleats or anchors): by engineer of record.
6. Square the layout so both corner-to-corner diagonals match the dimension shown.
7. Spacing is from the outside corner of the building line to post centers; corner posts sit inside the corner.

BUILT
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
Sample: 40x80 stepped shop house with wraparound porch

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
POST AND FOUNDATION PLAN

DATE 2026-10-16
REVISION 0
DRAWN BY BUILT
JOB NO. SAMPLE
SCALE AS NOTED
PAPER Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 2 OF 13

S-101

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

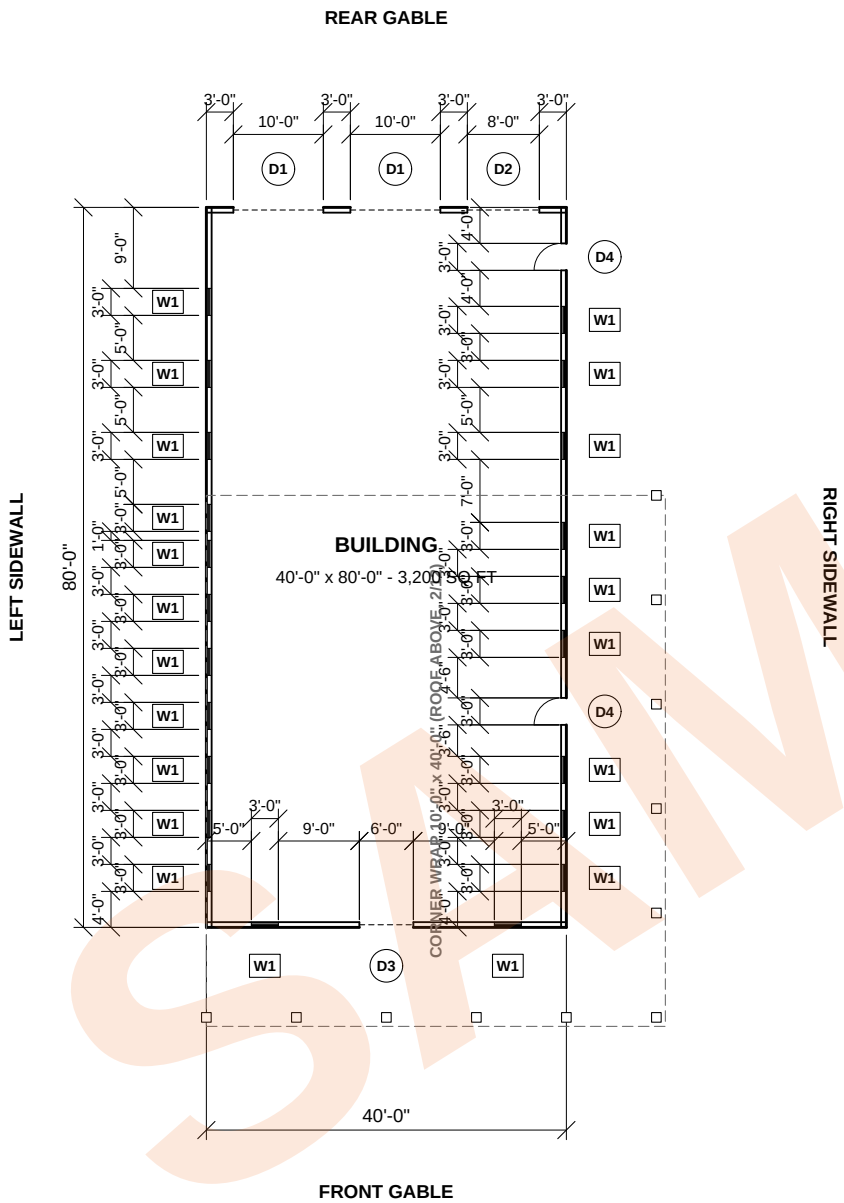

1 A-101 **FLOOR PLAN**

SCALE: 3/64" = 1'-0"

0 40'

Opening schedule

Mark	Type	Size (W x H)	Qty	Wall(s)
D1	Overhead door	10'-0" x 12'-0"	2	Rear
D2	Overhead door	8'-0" x 10'-0"	1	Rear
D3	Sliding door	6'-0" x 6'-8"	1	Front
D4	Man door	3'-0" x 6'-8"	2	Right
W1	Window	3'-0" x 4'-0"	22	Left, Right, Front

Opening locations

Mark	Wall	From corner	Sill / head
D1	Rear	3'-0" from left sidewall	0'-0" / 12'-0"
D1	Rear	16'-0" from left sidewall	0'-0" / 12'-0"
D2	Rear	29'-0" from left sidewall	0'-0" / 10'-0"
D3	Front	17'-0" from left sidewall	0'-0" / 6'-8"
D4	Right	22'-6" from front	0'-0" / 6'-8"
D4	Right	73'-0" from front	0'-0" / 6'-8"
W1	Left	4'-0" from front	3'-0" / 7'-0"
W1	Left	10'-0" from front	3'-0" / 7'-0"
W1	Left	16'-0" from front	3'-0" / 7'-0"
W1	Left	22'-0" from front	3'-0" / 7'-0"
W1	Left	28'-0" from front	3'-0" / 7'-0"
W1	Left	34'-0" from front	3'-0" / 7'-0"
W1	Left	40'-0" from front	3'-0" / 7'-0"
W1	Left	44'-0" from front	3'-0" / 7'-0"
W1	Left	52'-0" from front	3'-0" / 7'-0"
W1	Left	60'-0" from front	3'-0" / 7'-0"
W1	Left	68'-0" from front	3'-0" / 7'-0"
W1	Right	4'-0" from front	3'-0" / 7'-0"
W1	Right	10'-0" from front	3'-0" / 7'-0"
W1	Right	16'-0" from front	3'-0" / 7'-0"
W1	Right	30'-0" from front	3'-0" / 7'-0"
W1	Right	36'-0" from front	3'-0" / 7'-0"
W1	Right	42'-0" from front	3'-0" / 7'-0"
W1	Right	52'-0" from front	3'-0" / 7'-0"
W1	Right	60'-0" from front	3'-0" / 7'-0"
W1	Right	66'-0" from front	3'-0" / 7'-0"
W1	Front	5'-0" from left sidewall	3'-0" / 7'-0"
W1	Front	32'-0" from left sidewall	3'-0" / 7'-0"

BUILT
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
Sample: 40x80 stepped shop house with wraparound porch

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
FLOOR PLAN AND OPENING SCHEDULE

DATE 2026-10-16
REVISION 0
DRAWN BY BUILT
JOB NO. SAMPLE
SCALE AS NOTED
PAPER Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 3 OF 13

A-101

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

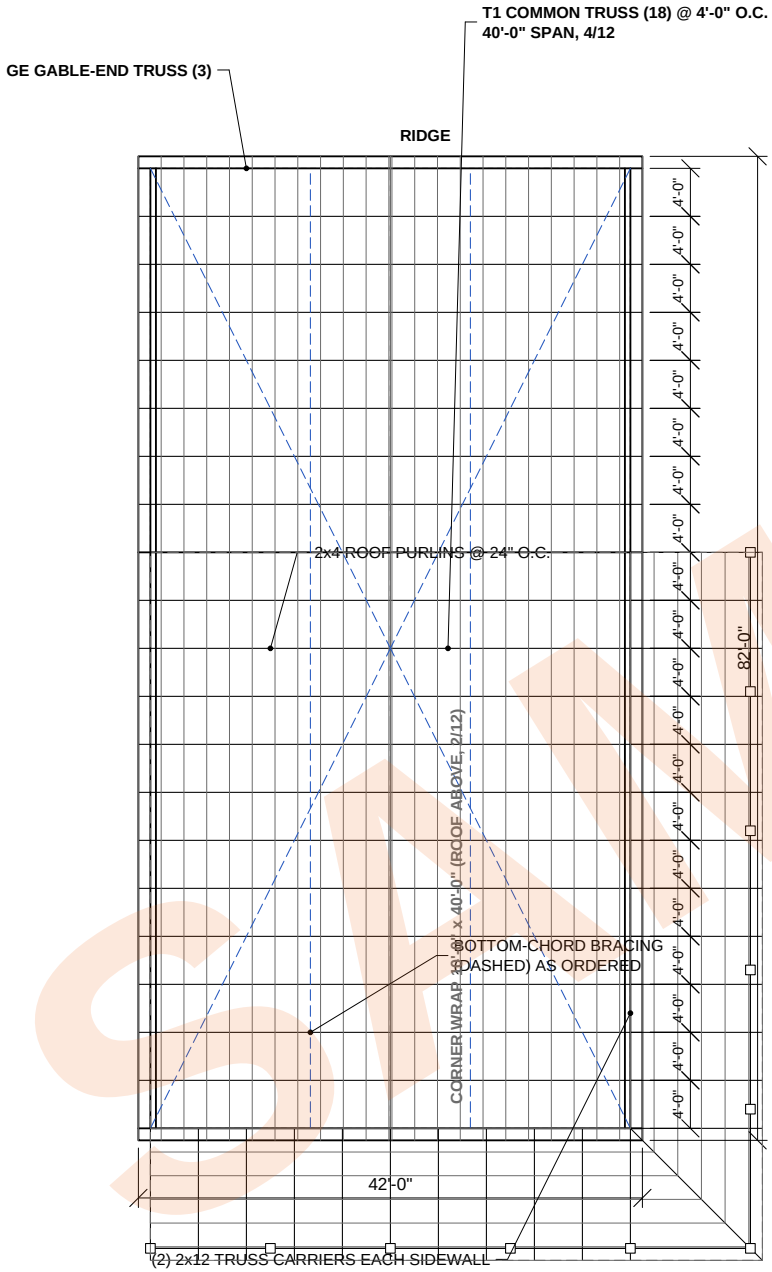

1 S-102 **ROOF FRAMING PLAN**

SCALE: 1/16" = 1'-0" 0 16'

Truss schedule

Mark	Truss	Qty	Span
T1	Common, 4/12, 12" tails	18	40'-0"
GE	Gable-end (each end wall)	3	40'-0"

Truss design loads

Ground snow Pg	BY ENGINEER OF RECORD
Roof snow Pf	BY ENGINEER OF RECORD
TCLL / TCDL	BY ENGINEER OF RECORD / BY ENGINEER OF RECORD
BCLL / BCDL	BY ENGINEER OF RECORD / BY ENGINEER OF RECORD
Wind	BY ENGINEER OF RECORD, exp. BY ENGINEER OF RECORD
Uplift / bearing	BY ENGINEER OF RECORD

ROOF FRAMING NOTES

1. Trusses by BY ENGINEER OF RECORD; the supplier's sealed truss drawings govern. Spacing 4'-0" o.c.
2. Purlins: 2x4 roof purlins @ 24" o.c., face-mounted; 26 rows. Purlin-to-truss connection per truss supplier / engineer.
3. Truss carriers: (2) 2x12 on each sidewall, one ply each face of the posts; splices bear on posts.
4. Bracing as ordered: Two longitudinal bottom-chord continuous lateral-restraint rows plus four corner-to-center diagonal bottom-chord braces; final layout and connections require truss-supplier verification. Permanent truss restraint per the truss drawings and BCSI.
5. Truss-to-carrier, carrier-to-post and purlin connections: by engineer of record.
6. Attached roof 1: corner-wrap, 10'-0" x 40'-0", 2/12, 2x8 rafters @ 4'-0" o.c., purlins @ 24" o.c., posts @ 12'-0" o.c.

BUILT
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
Sample: 40x80 stepped shop house with wraparound porch

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
ROOF FRAMING PLAN

DATE	REVISION
2026-10-16	0
DRAWN BY	JOB NO.
BUILT	SAMPLE
SCALE	PAPER
1/16"=1'	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 4 OF 13

S-102


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

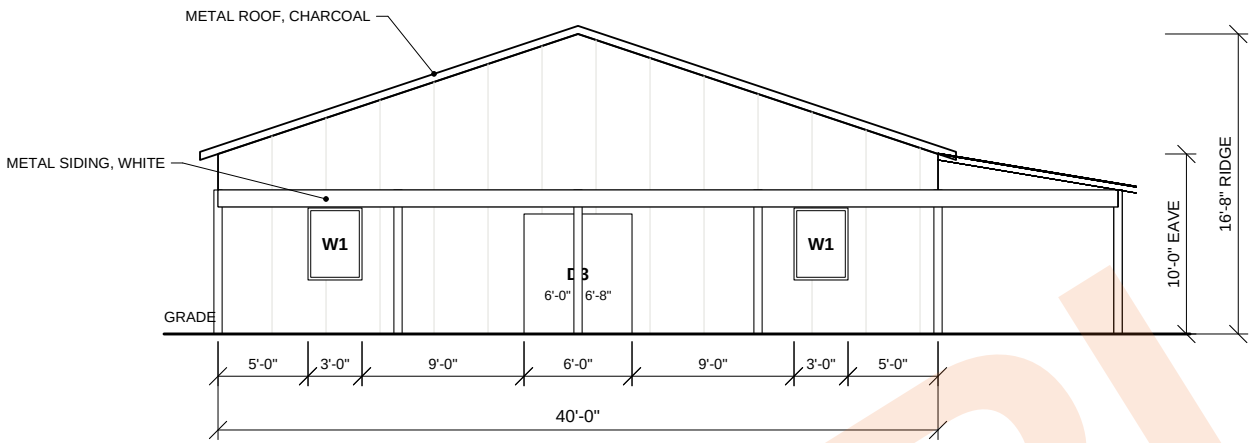

1 A-201 **FRONT ELEVATION**

SCALE: 3/32" = 1'-0" 0 16'

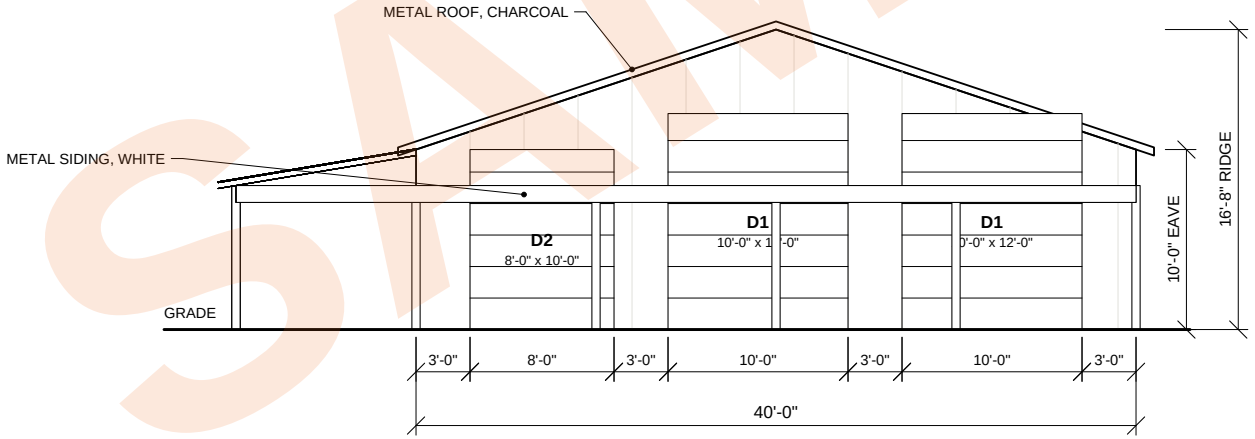

2 A-201 **REAR ELEVATION**

SCALE: 3/32" = 1'-0" 0 16'

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

EXTERIOR ELEVATIONS - FRONT AND REAR

DATE	REVISION
2026-10-16	0
DRAWN BY	JOB NO.
BUILT	SAMPLE
SCALE	PAPER
3/32"=1'	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 5 OF 13

A-201


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

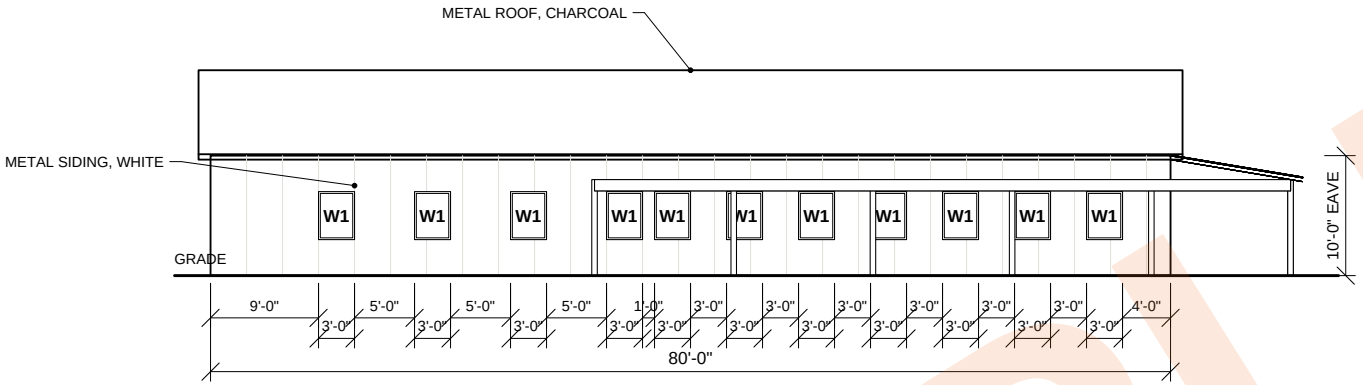

1 A-202 **LEFT ELEVATION**

SCALE: 1/16" = 1'-0"

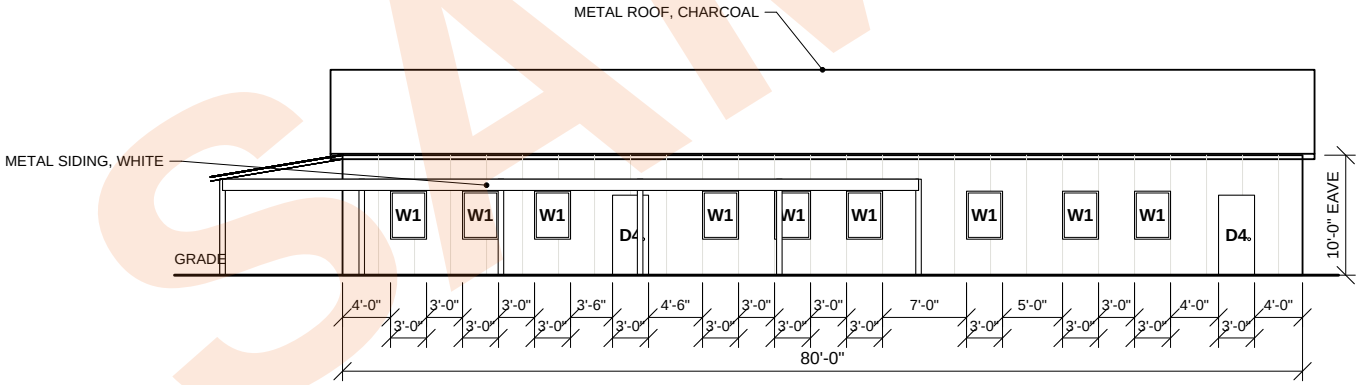

2 A-202 **RIGHT ELEVATION**

SCALE: 1/16" = 1'-0"

SAMPLE

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

EXTERIOR ELEVATIONS - LEFT AND RIGHT

DATE	REVISION
2026-10-16	0

DRAWN BY	JOB NO.
BUILT	SAMPLE

SCALE	PAPER
1/16"=1'	Letter 8 1/2" x 11"


PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 6 OF 13

A-202

SAMPLE ONLY - BUILT - not for construction or ordering

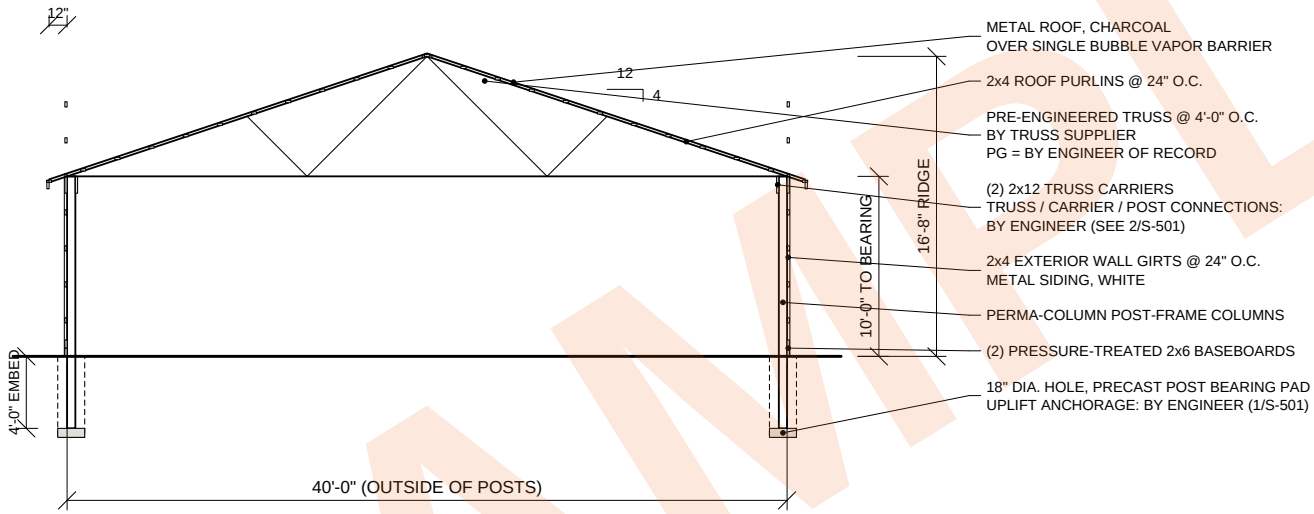

HEIGHTS ARE FROM GRADE TO THE TOP OF THE CARRIERS (TRUSS BEARING).

1 S-201 **BUILDING CROSS SECTION**

SCALE: 3/32" = 1'-0" 0 16'

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

BUILDING SECTION

DATE	REVISION
2026-10-16	0
DRAWN BY	JOB NO.
BUILT	SAMPLE
SCALE	PAPER
3/32"=1'	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 7 OF 13

S-201


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

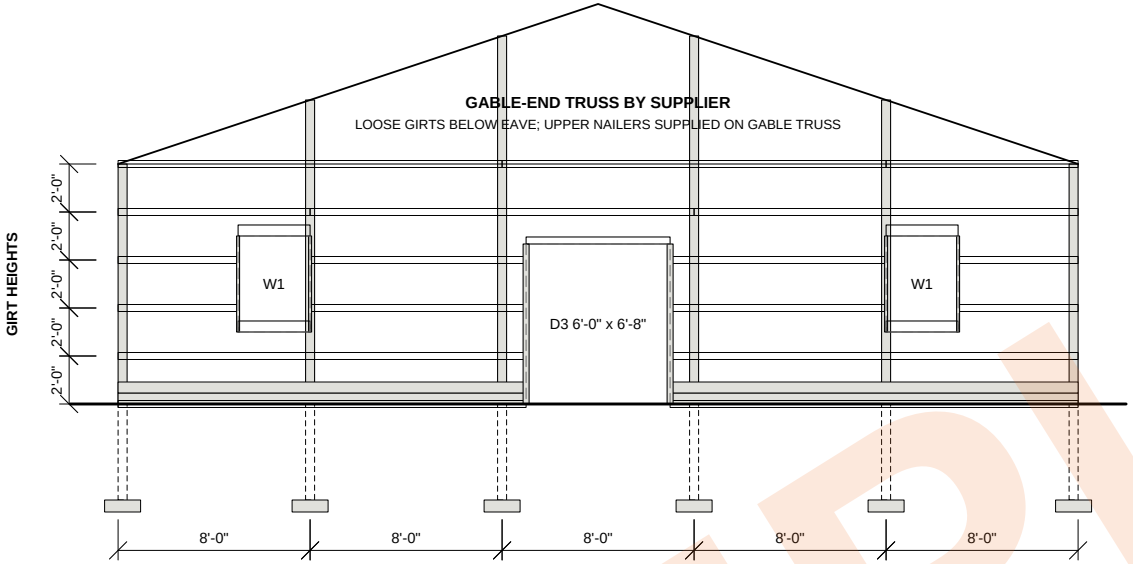

1 S-301 **FRONT WALL FRAMING**

SCALE: 1/8" = 1'-0"

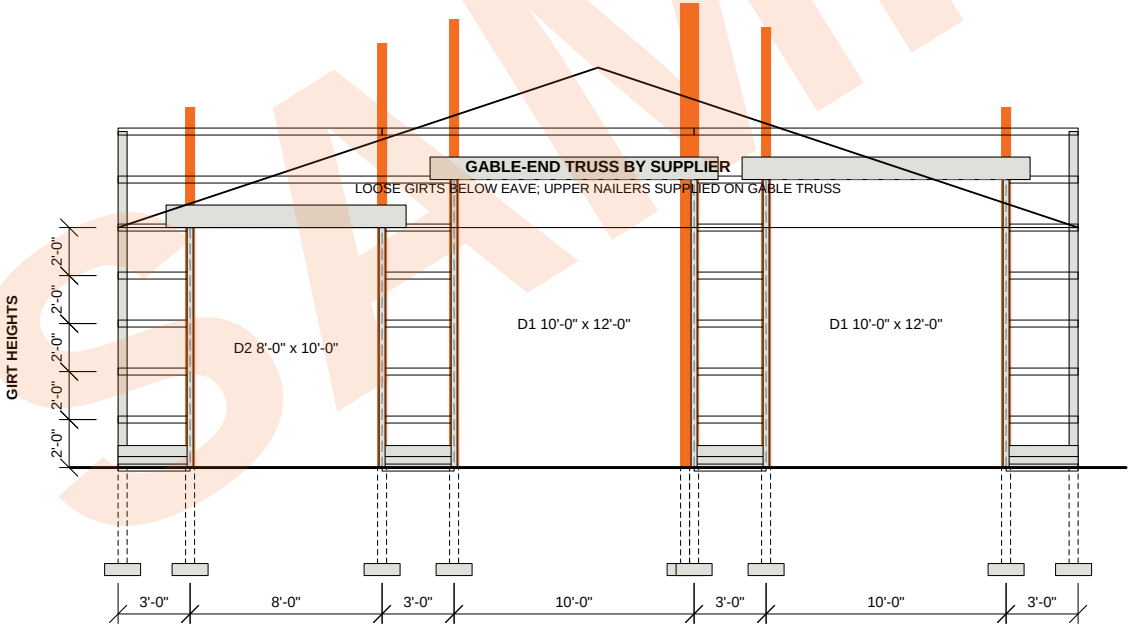

2 S-301 **REAR WALL FRAMING**

SCALE: 1/8" = 1'-0"

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

WALL FRAMING - FRONT AND REAR

DATE	REVISION
2026-10-16	0

DRAWN BY	JOB NO.
BUILT	SAMPLE

SCALE	PAPER
1/8"=1'	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 8 OF 13

S-301


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

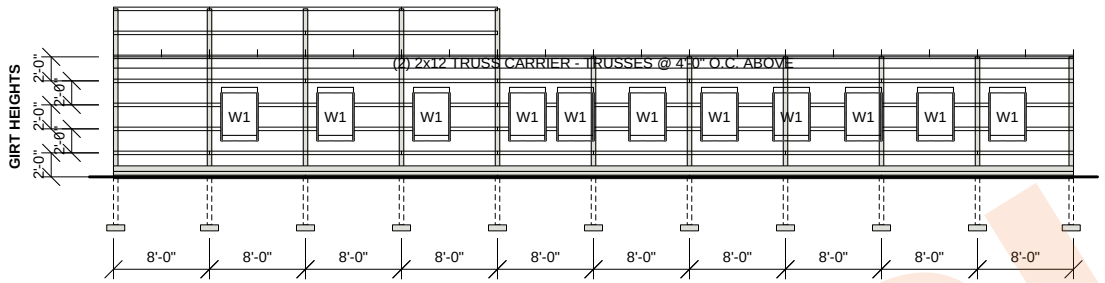

1 S-302 **LEFT WALL FRAMING**

SCALE: 1/16" = 1'-0" 0 16'

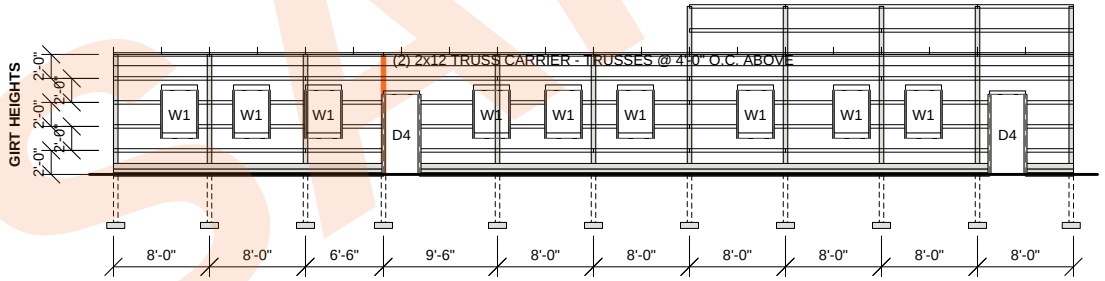

2 S-302 **RIGHT WALL FRAMING**

SCALE: 1/16" = 1'-0" 0 16'

BUILT
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
Sample: 40x80 stepped shop house with wraparound porch

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
WALL FRAMING - LEFT AND RIGHT

DATE	REVISION
2026-10-16	0
DRAWN BY	JOB NO.
BUILT	SAMPLE
SCALE	PAPER
1/16"=1'	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.


ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 9 OF 13

S-302

SAMPLE


SAMPLE ONLY - BUILT - not for construction or ordering

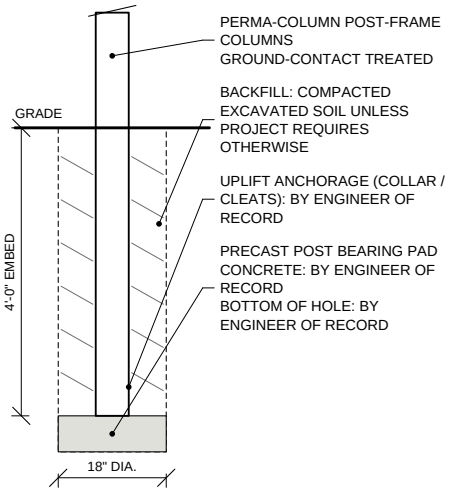

1 POST FOOTING

S-501

SCALE: 3/8" = 1'-0"

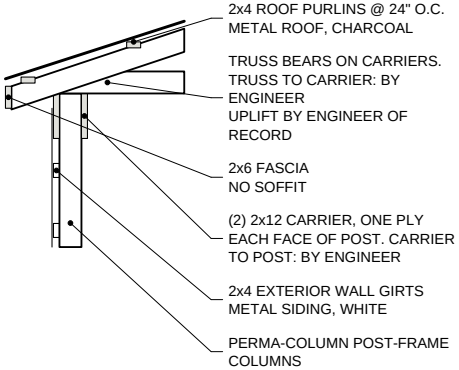


2 EAVE AND TRUSS BEARING

S-501

SCALE: 1/4" = 1'-0"

0 4'

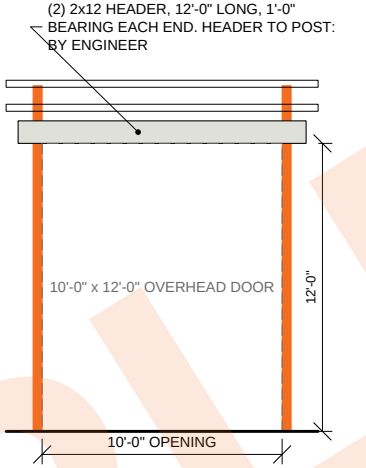


3 OVERHEAD DOOR HEADER

S-501

SCALE: 1/8" = 1'-0"

0 8'

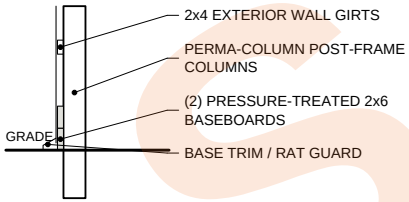


4 WALL BASE

S-501

SCALE: 1/4" = 1'-0"

0 4'

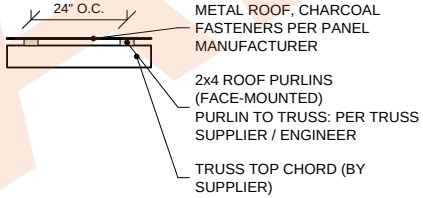


5 PURLIN AT TRUSS

S-501

SCALE: 1/4" = 1'-0"

0 4'

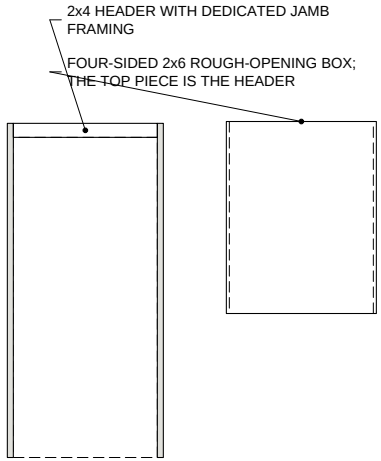

6 MAN DOOR AND WINDOW FRAMING

S-501

SCALE: 1/4" = 1'-0"

0 4'

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

TYPICAL DETAILS

DATE	REVISION
2026-10-16	0
DRAWN BY	JOB NO.
BUILT	SAMPLE
SCALE	PAPER
AS NOTED	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 10 OF 13

S-501

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

Column schedule

Columns	Qty	Length	Note
Sidewall/corner columns	12	16'-0"	stepped-height sidewalls; includes 2' stock allowance
Sidewall/corner columns	10	20'-0"	stepped-height sidewalls; includes 2' stock allowance
Gable-interior columns	2	20'-0"	symmetrical roof-height stock; includes 2' stock allowance
Gable-interior columns	2	22'-0"	symmetrical roof-height stock; includes 2' stock allowance
Gable-interior columns	1	26'-0"	symmetrical roof-height stock; includes 2' stock allowance
Living-section back-gable interior columns	4	20'-0"	8' maximum spacing; columns continue to 14' attached-section eave; sidewall edge columns shared; no additional lower gable truss
Living-section back-gable man-door support column	1	20'-0"	Standard man-door method; column continues to 14' attached-section eave; exact jamb relationship requires field confirmation
Additional opening columns	2	22'-0"	jamb posts of a clear gable bay; roof-height stock; includes 2' stock allowance
Additional opening columns	1	24'-0"	jamb posts of a clear gable bay; roof-height stock; includes 2' stock allowance
Additional opening columns	3	26'-0"	jamb posts of a clear gable bay; roof-height stock; includes 2' stock allowance

Header schedule

Mark	Opening	Header	Length
D1	10'-0" x 12'-0"	(2) 2x12	12'-0"
D2	8'-0" x 10'-0"	(2) 2x12	10'-0"

Opening schedule

Mark	Type	Size	Wall
D1	Overhead door	10'-0" x 12'-0"	Rear
D1	Overhead door	10'-0" x 12'-0"	Rear
D2	Overhead door	8'-0" x 10'-0"	Rear

Opening schedule (cont.)

Mark	Type	Size	Wall
D3	Sliding door	6'-0" x 6'-8"	Front
D4	Man door	3'-0" x 6'-8"	Right
D4	Man door	3'-0" x 6'-8"	Right
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Left
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Right
W1	Window	3'-0" x 4'-0"	Front
W1	Window	3'-0" x 4'-0"	Front

Framing lumber (as ordered)

Item	Size	Qty	Length
Sidewall/corner columns	Perma-Column post-frame columns	12	16'
Sidewall/corner columns	Perma-Column post-frame columns	10	20'
Gable-interior columns	Perma-Column post-frame columns	2	20'
Gable-interior columns	Perma-Column post-frame columns	2	22'

Framing lumber (as ordered) (cont.)

Item	Size	Qty	Length
Gable-interior columns	Perma-Column post-frame columns	1	26'
Living-section back-gable interior columns	Perma-Column post-frame columns	4	20'
Living-section back-gable man-door support column	Perma-Column post-frame columns	1	20'
Additional opening columns	Perma-Column post-frame columns	2	22'
Additional opening columns	Perma-Column post-frame columns	1	24'
Additional opening columns	Perma-Column post-frame columns	3	26'
Perma-Column foundation units	Perma-Column unit	49	-
Living-section back-gable passage-door header	2x4	Included in 2x4 door header stock	4'
Engineered common trusses	40' span - 4/12	18	Engineered
Engineered gable-end trusses	40' span - 4/12	3	Engineered
Sidewall truss carriers	2x12	20	16'
Treated baseboards / skirt boards	2x6 PT	30	16'
Left sidewall girts	2x4	55	16'
Right sidewall girts	2x4	2	20'
Right sidewall girts	2x4	55	16'
Front gable rectangular-wall girts	2x4	4	20'
Front gable rectangular-wall girts	2x4	14	16'
Rear gable rectangular-wall girts	2x4	30	16'
Stepped-height transition-wall girts	2x4	6	20'
Living-section back-gable wall girts	2x4	8	20'
Living-section back-gable wall girts	2x4	6	16'
Wall-girt waste / spare allowance	2x4	6	16'

BUILT
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
Sample: 40x80 stepped shop house with wraparound porch

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
SCHEDULES (1 OF 2)

DATE
2026-10-16

REVISION
0

DRAWN BY
BUILT

JOB NO.
SAMPLE

SCALE
NONE

PAPER
Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 11 OF 13

S-601

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

Framing lumber (as ordered) (cont.)

Item	Size	Qty	Length
MAIN-ROOF PURLINS - BOTH ROOF SLOPES	2x4	144	16'
Bottom-chord continuous lateral restraint (BCLR / rat runs)	2x4	10	16'
Bottom-chord diagonal bracing	2x4	12	16'
Eave and rake fascia	2x6	17	16'
Window rough-opening box framing	2x6	21	16'
Garage/sliding/man-door jamb and support framing	Profile verification	8	16'
Man, sliding and passage door header stock	2x4	1	16'
Overhead-door header #1 - Rear gable	2x12	2	12'
Overhead-door header #2 - Rear gable	2x12	2	12'
Overhead-door header #3 - Rear gable	2x12	2	10'
Attached roof #1 outside columns	Perma-Column post-frame columns	11	16'
Attached roof #1 inside attachment header / ledger	2x12	4	24'
Attached roof #1 outside post-line header / beam	2x12	9	24'
Attached roof #1 common and jack rafters	2x8	24	12'
Attached roof #1 structural hip rafter	2x8	1	16'
Attached roof #1 roof purlins	2x4	44	16'
Attached roof #1 fascia	2x6	7	16'

Attached roof 1 (corner-wrap)

Size	10'-0" x 40'-0", 2/12
Posts	11 @ 12'-0" o.c., outer eave 8'-0"
Rafters	24 2x8 @ 4'-0" o.c., 11'-1 13/16" (12' stock)
Beam / ledger	216 LF beam, 88 LF ledger (2x12)
Purlins	697.18 LF @ 24" o.c.
Roof area	1104 sq ft

BUILT
POLE BARNS - POST FRAME
Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT
Sample: 40x80 stepped shop house with wraparound porch

OWNER
Sample Customer

SITE
-

JURISDICTION
-

SHEET TITLE
SCHEDULES (2 OF 2)

DATE
2026-10-16

REVISION
0

DRAWN BY
BUILT

JOB NO.
SAMPLE

SCALE
NONE

PAPER
Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 12 OF 13

S-602

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

IMPORTANT LEGAL NOTICE AND LIMITATIONS

MATERIAL TAKEOFF ONLY - NOT ENGINEERING OR CONSTRUCTION DRAWINGS

This report is provided solely as a preliminary material-quantity estimate based on information supplied by the customer and the calculator settings shown in the report. Jesse McCoun and BUILT are not licensed professional engineers or architects. This report is not an engineered design, architectural or construction drawing, permit drawing, structural analysis, certification, or representation of structural adequacy, code compliance, or permit approval.

This report does not determine or verify design loads; wind, snow, rain, flood, or seismic requirements; soil or site conditions; foundations or post embedment; truss or component engineering; member sizes, spans, connections, or bracing; fire and life-safety requirements; zoning; utilities; mechanical, electrical, plumbing, or HVAC systems; accessibility; energy-code compliance; or any other project-specific legal or code requirement.

Before ordering materials, applying for a permit, or beginning construction, the owner, customer, contractor, and suppliers are responsible for independently verifying all dimensions, quantities, specifications, opening locations, field conditions, product requirements, and applicable codes. Obtain all required approvals and any structural design or sealed drawings from a properly licensed design professional and the authority having jurisdiction. Supplier-engineered components must be reviewed and installed according to their approved drawings and instructions.

This report is an estimating aid only and must not be relied upon as a substitute for professional design, engineering judgment, permit approval, manufacturer instructions, or field verification. Quantities and specifications may change after engineering, supplier review, code review, or site verification. To the fullest extent permitted by applicable law, BUILT makes no warranty that this report is complete, structurally adequate, code compliant, fit for a particular construction purpose, or acceptable for permitting, and is not responsible for errors or losses resulting from inaccurate or incomplete customer information, unverified conditions, substitutions, later changes, or use of this report beyond its stated estimating purpose.

RECIPIENT ACKNOWLEDGMENT

By ordering, accepting, or using this report, the recipient acknowledges these limitations and accepts responsibility for obtaining all required professional review, engineering, field verification, permits, and approvals before construction.

BUILT

POLE BARNS - POST FRAME

Jesse McCoun
(330) 500-6701
jesse.built@outlook.com

PROJECT

Sample: 40x80 stepped shop house with wraparound porch

OWNER

Sample Customer

SITE

-

JURISDICTION

-

SHEET TITLE

LEGAL NOTICE

DATE	REVISION
2026-10-16	0

DRAWN BY	JOB NO.
BUILT	SAMPLE

SCALE	PAPER
NONE	Letter 8 1/2" x 11"

PRELIMINARY - FOR ENGINEER REVIEW. NOT FOR CONSTRUCTION UNTIL SIGNED AND SEALED BY A LICENSED DESIGN PROFESSIONAL.

ENGINEER OF RECORD - SEAL / SIGNATURE

SHEET 13 OF 13

G-002

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering