Jesse McCoun
Cell / text (330) 500-6701
jesse.built@outlook.com

POLE-BARN TAKEOFF

Complete Project Report

Material quantities only · no prices

PROJECT	CUSTOMER	JOB / PROJECT ID
Sample: 40×80 stepped shop house with wraparound porch	Sample Customer	SAMPLE
REVISION	**ESTIMATOR**	**TAKEOFF STATUS**
0	BUILT	HUMAN REVIEW REQUIRED


BUILT Standard · version 1 HUMAN REVIEW REQUIRED BUILT-TAKEOFF-2026.08-P2

01 Building specification summary

Main building	**40′ wide × 80′ long · 10′/14′ stepped eaves**	4/12 metal gable roof
Connected sections	**48′ front/living at 10′**	32′ rear/garage at 14′ · 160 sq ft transition wall
Overhangs	**12″ eaves · 12″ gables**	horizontal projection
Structural layout	**8′ side posts · 8′ gable posts**	4′ trusses · 24″ purlins · 24″ girts
Permanent truss bracing	**2 bottom-chord restraint rows**	4 corner-to-center diagonal runs · truss-supplier verification required
Wall and roof finish	**Exposed-fastener metal walls**	36″ coverage metal roof
Vapor barrier	**Single bubble white/foil · roof only**	8 × 4′ × 125′ rolls · 3,630 sq ft
Roof edge trim	**Residential rake on the gable edges**	8 × 12′ made-to-length · J&F channel on the eaves
Wainscot	**None**	Wall #e9e8e1 · roof #45494b · trim #ecebe5
Interior	**No wall liner · no ceiling liner · 40′ × 10′ lined partition**	No wall insulation · no partition insulation · no ceiling insulation

SAMPLE

FRONT-LEFT EXTERIOR

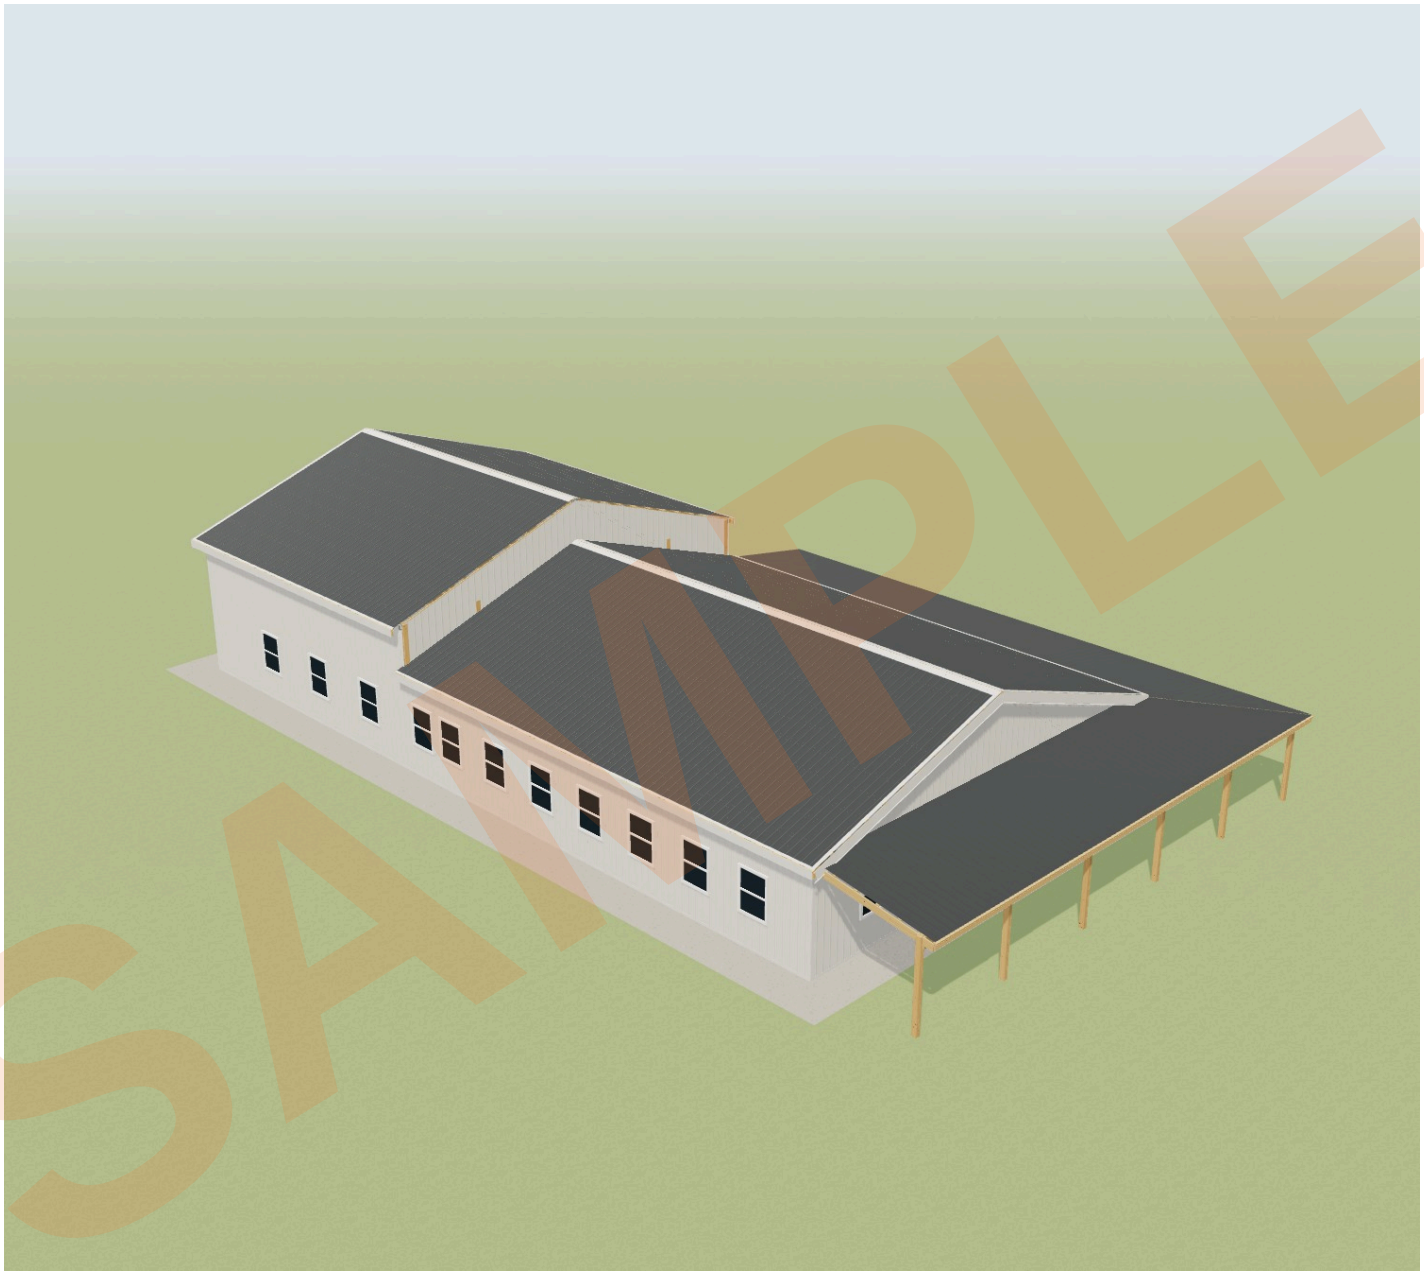


Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

FRONT-RIGHT EXTERIOR

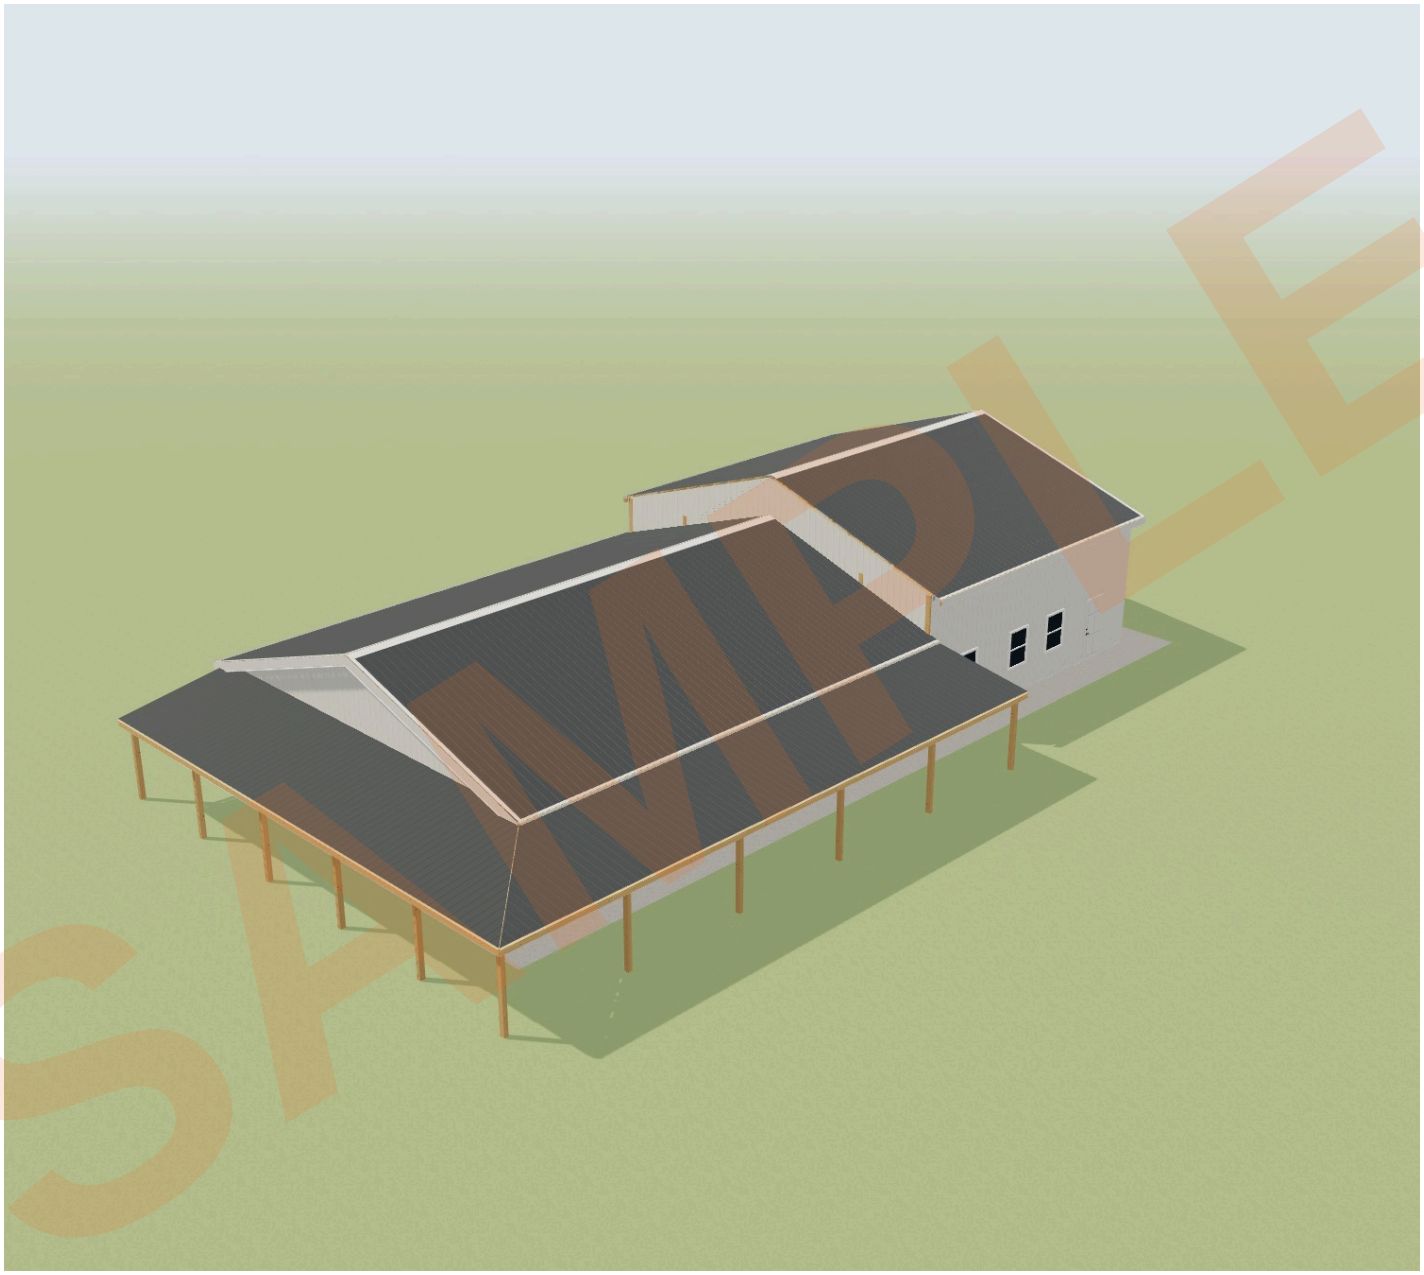

Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

REAR-LEFT EXTERIOR



Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

REAR-RIGHT EXTERIOR




Realistic view drawn from the takeoff; verify dimensions, opening locations and supplier color samples before approval.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

FRAMING VIEW

REALISTIC MODEL · ACTUAL LUMBER SIZES

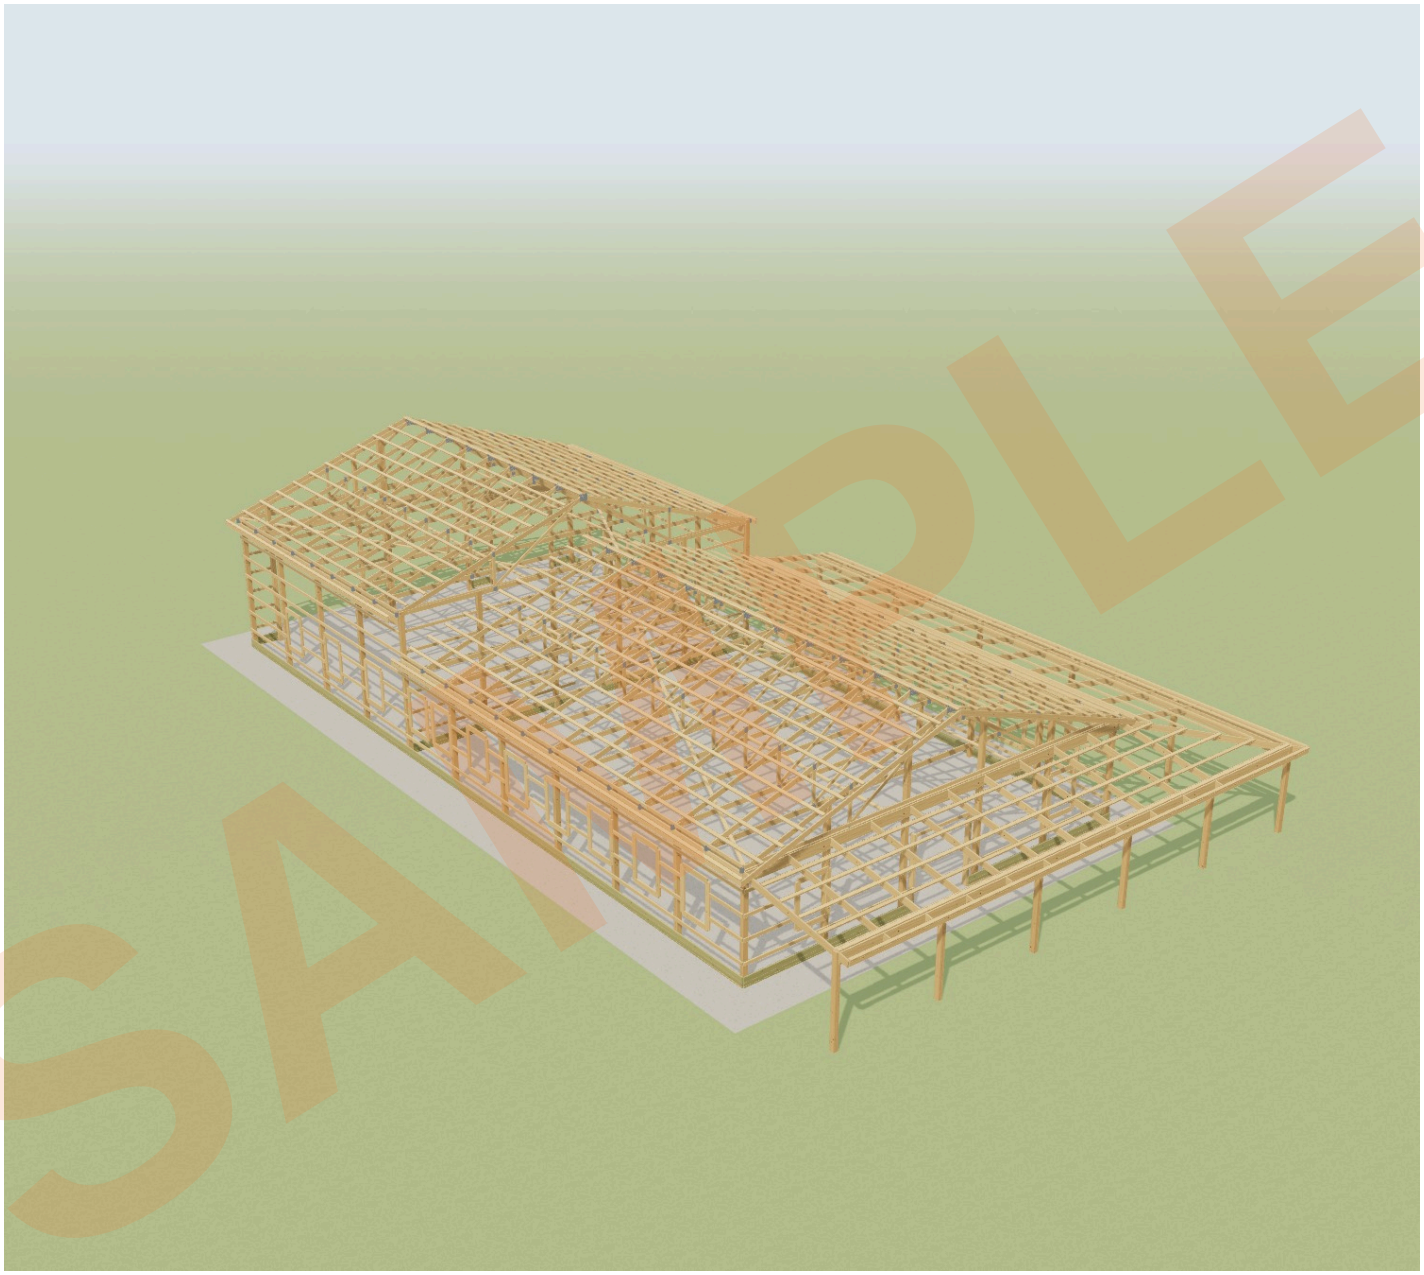


Framing drawn from the same components as the lumberyard order: posts, carriers, trusses, purlins, girts, skirt and opening framing.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

EXPLODED VIEW

LAYERS PULLED APART IN INSTALL ORDER

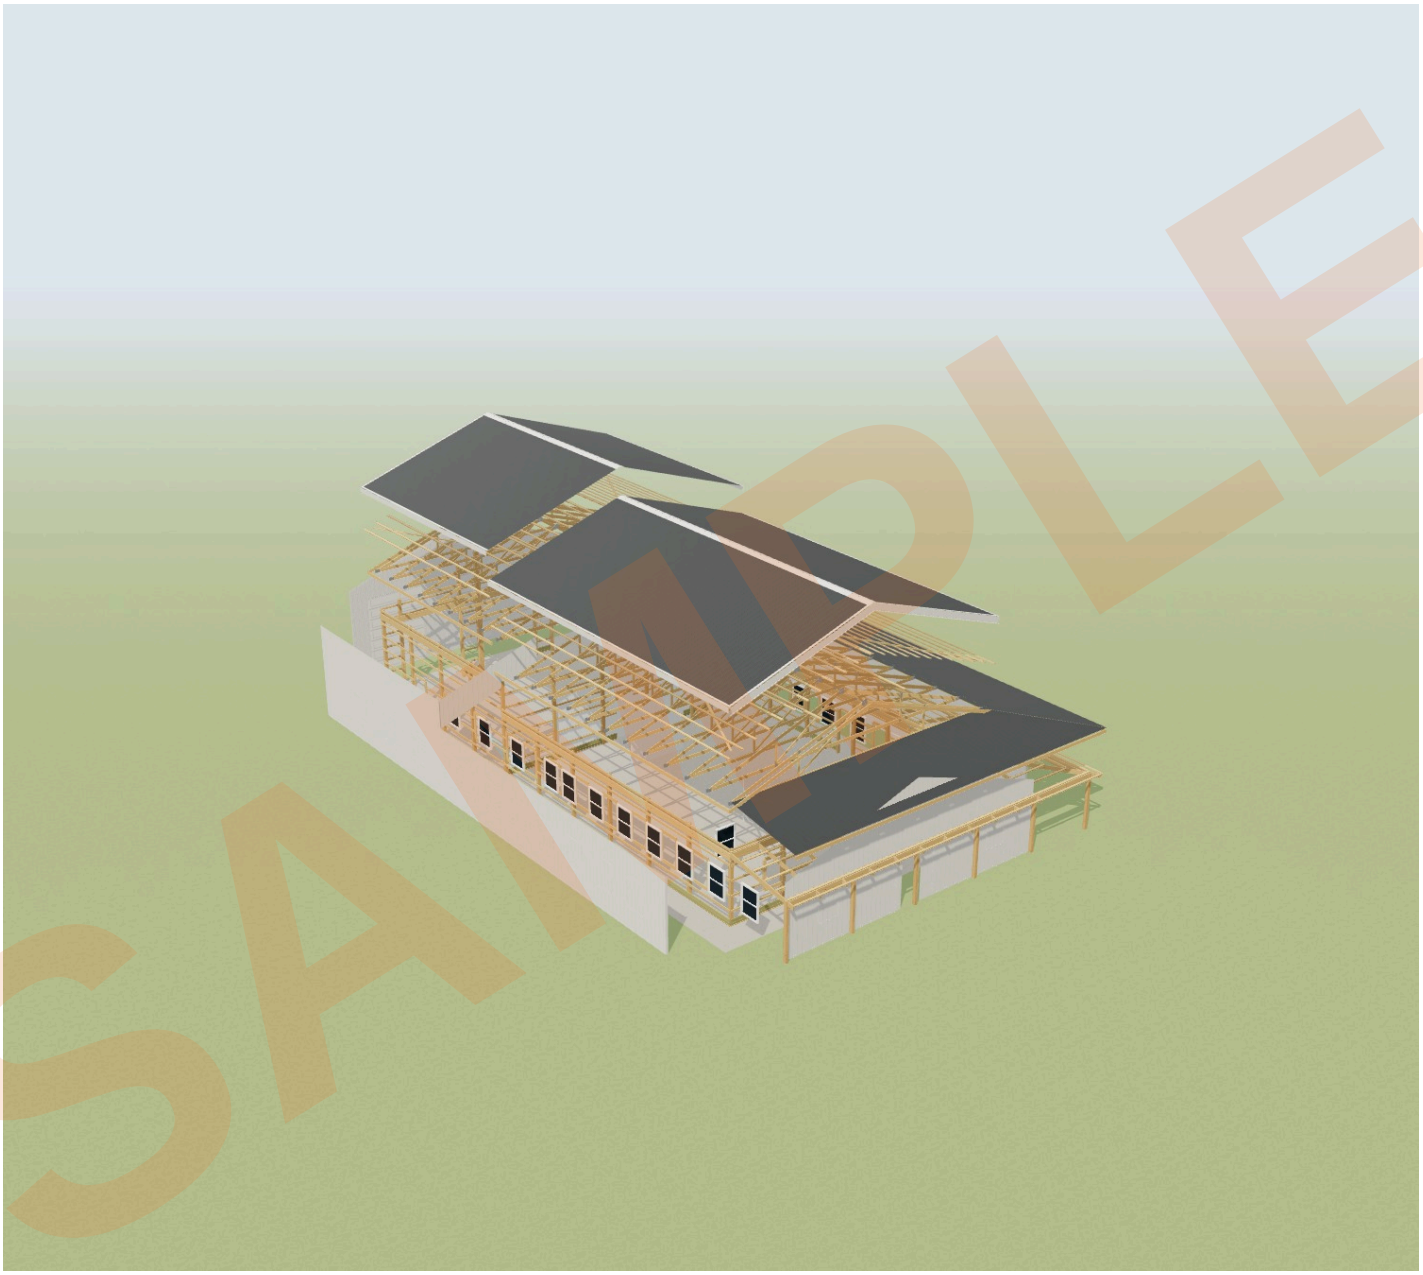

Frame, trusses, purlins, roof covering and wall covering separated to show how the ordered materials fit together.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

03 Openings and attached roofs

Opening / assembly	Location	Size
2 × Overhead garage doors	**Rear gable**	10′ × 12′
1 × Overhead garage door	**Rear gable**	8′ × 10′
1 × Sliding door	**Front gable**	6′ × 6′ 8″
2 × Man doors	**Right sidewall**	36″ × 80″
22 × Windows	**Left sidewall · Right sidewall · Front gable**	36″ × 48″
Interior passage door	**Living/garage partition**	36″ × 80″ · preliminary offset 18.5′
Attached roof #1	**Front-right corner**	40′ + 48′ legs × 10′ projection

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

04 Consolidated lumberyard order

Every piece to pull, grouped the way the yard stocks it. Identical sizes and lengths are totaled into one line.

	QTY	ITEM	LENGTH	USED FOR
POSTS AND COLUMNS				
☐	**23 pcs**	**Perma-Column post-frame columns**	**16′**	Sidewall/corner columns · Attached roof #1 outside columns
☐	**17 pcs**	**Perma-Column post-frame columns**	**20′**	Sidewall/corner columns · Gable-interior columns · Living-section back-gable interior columns · Living-section back-gable man-door support column
☐	**4 pcs**	**Perma-Column post-frame columns**	**22′**	Gable-interior columns · Additional opening columns
☐	**1 pc**	**Perma-Column post-frame columns**	**24′**	Additional opening columns
☐	**4 pcs**	**Perma-Column post-frame columns**	**26′**	Gable-interior columns · Additional opening columns
TRUSSES				
☐	**18 pcs**	**Common truss, 40′ span · 4/12**		Engineered; build to the supplier's drawings
☐	**3 pcs**	**Gable-end truss, 40′ span · 4/12**		Engineered; build to the supplier's drawings
TREATED LUMBER				
☐	**30 pcs**	**Treated 2×6**	**16′**	Treated baseboards / skirt boards
FRAMING LUMBER				
☐	**377 pcs**	**2×4**	**16′**	Wall girts · Spare allowance · Roof purlins · Truss lateral restraint · Truss diagonal bracing · Man, sliding and passage door header stock · Attached roof #1 roof purlins
☐	**20 pcs**	**2×4**	**20′**	Wall girts
☐	**45 pcs**	**2×6**	**16′**	Eave and rake fascia · Window rough-opening box framing · Attached roof #1 fascia
☐	**24 pcs**	**2×8**	**12′**	Attached roof #1 common and jack rafters
☐	**1 pc**	**2×8**	**16′**	Attached roof #1 structural hip rafter
☐	**2 pcs**	**2×12**	**10′**	Overhead-door header #3 — Rear gable
☐	**4 pcs**	**2×12**	**12′**	Overhead-door header #1 — Rear gable · Overhead-door header #2 — Rear gable
☐	**20 pcs**	**2×12**	**16′**	Sidewall truss carriers
☐	**13 pcs**	**2×12**	**24′**	Attached roof #1 inside attachment header / ledger · Attached roof #1 outside post-line header / beam
☐	**8 pcs**	**Garage/sliding/man-door jamb and support framing (profile verification)**	**16′**	Garage/sliding/man-door jamb and support framing
HARDWARE AND FASTENERS				
☐	**49 pcs**	**Perma-Column foundation units**		One per embedded column: 38 main building + 11 attached roof
☐	**5 boxes**	**3″ galvanized framing nails**	**500/box**	Framing nails

SAMPLE

05

Consolidated metal-shop order — panels and trim

Panels are cut to the lengths shown, longest first, with identical lengths in the same color totaled. Trim is in stock lengths unless marked cut to fit.

	QTY	ITEM	LENGTH	COLOR	USED FOR
ROOF PANELS					
☐	**37 pcs**	**Attached-roof blank (shop cuts taper)**	**11′ 2 13/16″**	Charcoal	Attached roof #1
☐	**56 pcs**	**Roof panel**	**22′ 1 5/8″**	Charcoal	Living section · Left roof slope · Garage section · Left roof slope · Living section · Right roof slope · Garage section · Right roof slope
WALL PANELS					
☐	**1 pc**	**Wall panel**	**20′**	White	Rear gable
☐	**1 pc**	**Wall panel**	**19′ 4″**	White	Rear gable
☐	**1 pc**	**Wall panel**	**19′**	White	Rear gable
☐	**1 pc**	**Wall panel**	**18′ 4″**	White	Rear gable
☐	**1 pc**	**Wall panel**	**16′ 4″**	White	Front gable
☐	**1 pc**	**Wall panel**	**16′**	White	Front gable
☐	**2 pcs**	**Wall panel**	**15′ 4″**	White	Front gable · Rear gable
☐	**2 pcs**	**Wall panel**	**15′**	White	Front gable · Rear gable
☐	**2 pcs**	**Wall panel**	**14′ 4″**	White	Front gable · Rear gable
☐	**23 pcs**	**Wall panel**	**14′**	White	Left sidewall · Right sidewall · Front gable
☐	**1 pc**	**Wall panel**	**13′ 4″**	White	Front gable
☐	**1 pc**	**Wall panel**	**13′**	White	Front gable
☐	**1 pc**	**Wall panel**	**12′ 4″**	White	Front gable
☐	**1 pc**	**Wall panel**	**12′**	White	Front gable
☐	**1 pc**	**Wall panel**	**11′ 4″**	White	Front gable
☐	**1 pc**	**Wall panel**	**11′**	White	Front gable
☐	**1 pc**	**Wall panel**	**10′ 4″**	White	Front gable
☐	**33 pcs**	**Wall panel**	**10′**	White	Left sidewall · Right sidewall · Front gable
☐	**1 pc**	**Wall panel**	**8′ 8″**	White	Rear gable
☐	**1 pc**	**Wall panel**	**8′ 4″**	White	Rear gable
☐	**1 pc**	**Wall panel**	**7′ 4″**	White	Rear gable
☐	**1 pc**	**Wall panel**	**6′ 4″**	White	Rear gable
☐	**1 pc**	**Wall panel**	**6′**	White	Rear gable
☐	**14 pcs**	**Wall panel**	**5′**	White	Rear gable · Stepped transition wall
☐	**1 pc**	**Wall panel**	**4′ 4″**	White	Stepped transition wall
☐	**1 pc**	**Wall panel**	**4′**	White	Rear gable
LINER PANELS					
☐	**14 pcs**	**Partition liner panel**	**10′**	White	Living/garage separation wall · garage face
TRIM					
☐	**9 pcs**	**Ridge cap**	**10′**	White	Main ridge
☐	**31 pcs**	**J&F eave channel**	**10′**	White	Eaves

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

	QTY	ITEM	LENGTH	COLOR	USED FOR
☐	8 pcs	Residential rake	12′	White	Gable rakes · made-to-length 10′–20′
☐	6 pcs	Sidewall flashing	10′	White	Lower roof at the stepped wall
☐	10 pcs	Attached-roof transition flashing	10′	White	Where attached roofs meet the wall
☐	2 pcs	Hip cap	10′	White	Attached-roof hips
☐	2 pcs	Outside corner	14′	White	Cut to length · building corners
☐	3 pcs	Outside corner	10′	White	Cut to length · building corners · 10′ stock, cut 2 @ 4′ step-return corners
☐	26 pcs	Base trim / rat guard	10′	White	Wall bottoms, door openings deducted · 237 LF
☐	4 pcs	Garage-door jamb and header trim	12′	White	Cut to length · overhead door jambs
☐	4 pcs	Garage-door jamb and header trim	10′	White	Cut to length · overhead door headers and jambs
☐	1 pc	Garage-door jamb and header trim	8′	White	Cut to length · overhead door headers
☐	42 pcs	Door and window J trim	10′	White	Windows, man doors and sliding door · 360 LF
☐	66 LF	Window sill trim	Cut to fit	White	Window and vent sills
VAPOR BARRIER					
☐	8 rolls	Single bubble vapor barrier	4′ × 125′ roll	White/Foil	Under roof metal 3,630 sq ft · 2″ seam laps
CLOSURES, SEALANT AND SCREWS					
☐	328 LF	Ridge and eave closures	Supplier package		Inside/outside profile to match the panel
☐	21 rolls	M-Seal expanding foam seal tape	13′ roll		Two runs at transition flashing
☐	3,789 pcs	Roof panel screws		Charcoal	Main roof · 80/100 sq ft · Attached roofs · 80/100 sq ft
☐	2,063 pcs	Wall panel screws		White	80/100 sq ft


SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

Post Layout

Sample: 40×80 stepped shop house with wraparound porch

40′ × 80′ · revision 0

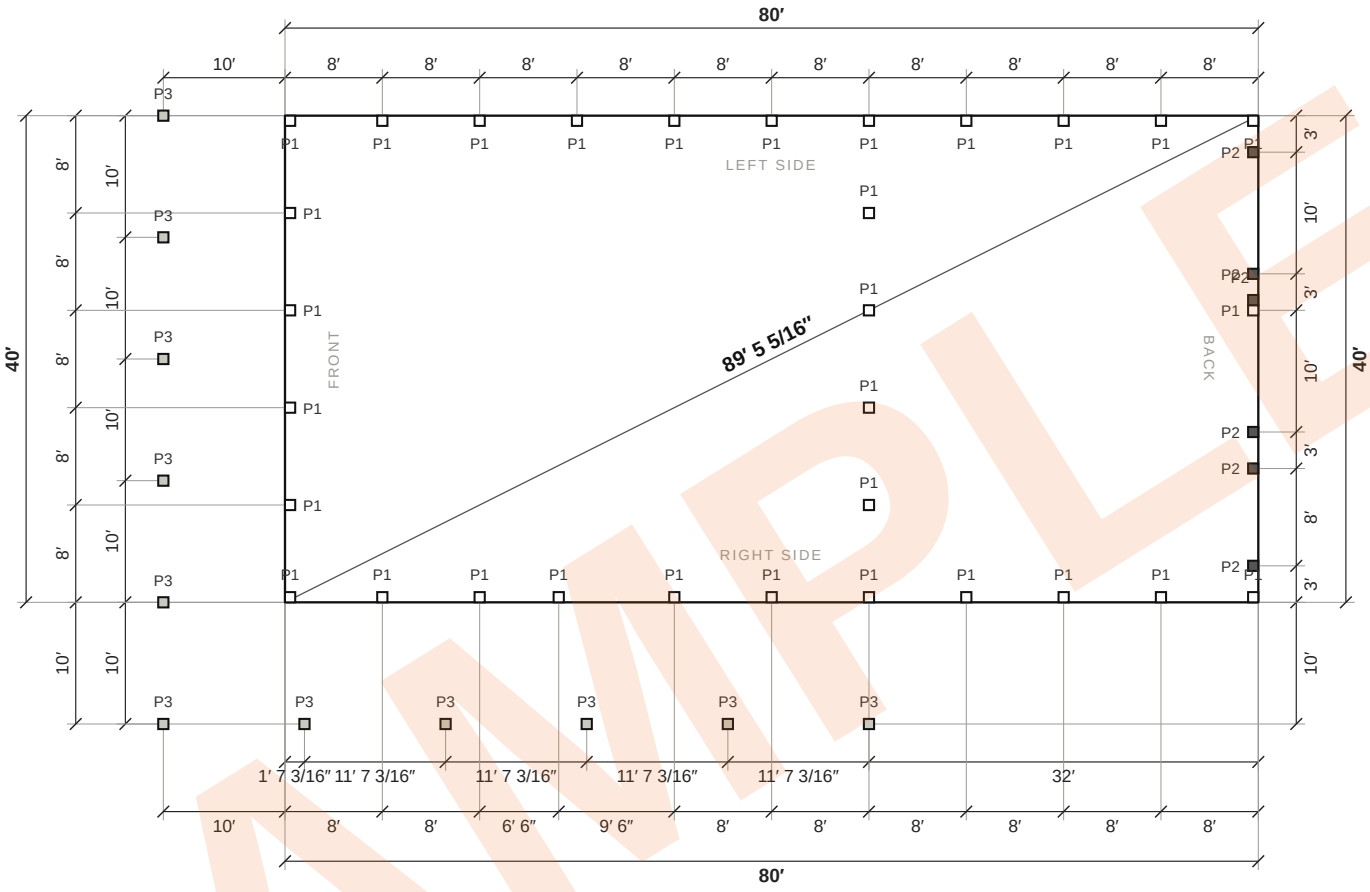

SAMPLE

CHECK SQUARE

89′ 5 5/16″


Both diagonals, outside corner to outside corner, read the same when the building is square.

P1	**31 × Wall columns** Perma-Column post-frame columns · 12 × 16′ · 16 × 20′ · 2 × 22′ · 1 × 26′ Perma-Column foundation units · 18″ hole × 4′ deep
P2	**6 × Door-opening jamb columns** Perma-Column post-frame columns · 2 × 22′ · 1 × 24′ · 3 × 26′ Perma-Column foundation units · 18″ hole × 4′ deep
P3	**11 × Attached-roof posts** Perma-Column post-frame columns · 11 × 16′ Perma-Column foundation units · 18″ hole × 4′ deep

Dimensions run to the outside face of the corner posts and to the centre of every other post. Girts and metal are outside this line.

SAMPLE ONLY - BUILT - not for construction or ordering

06 Post layout

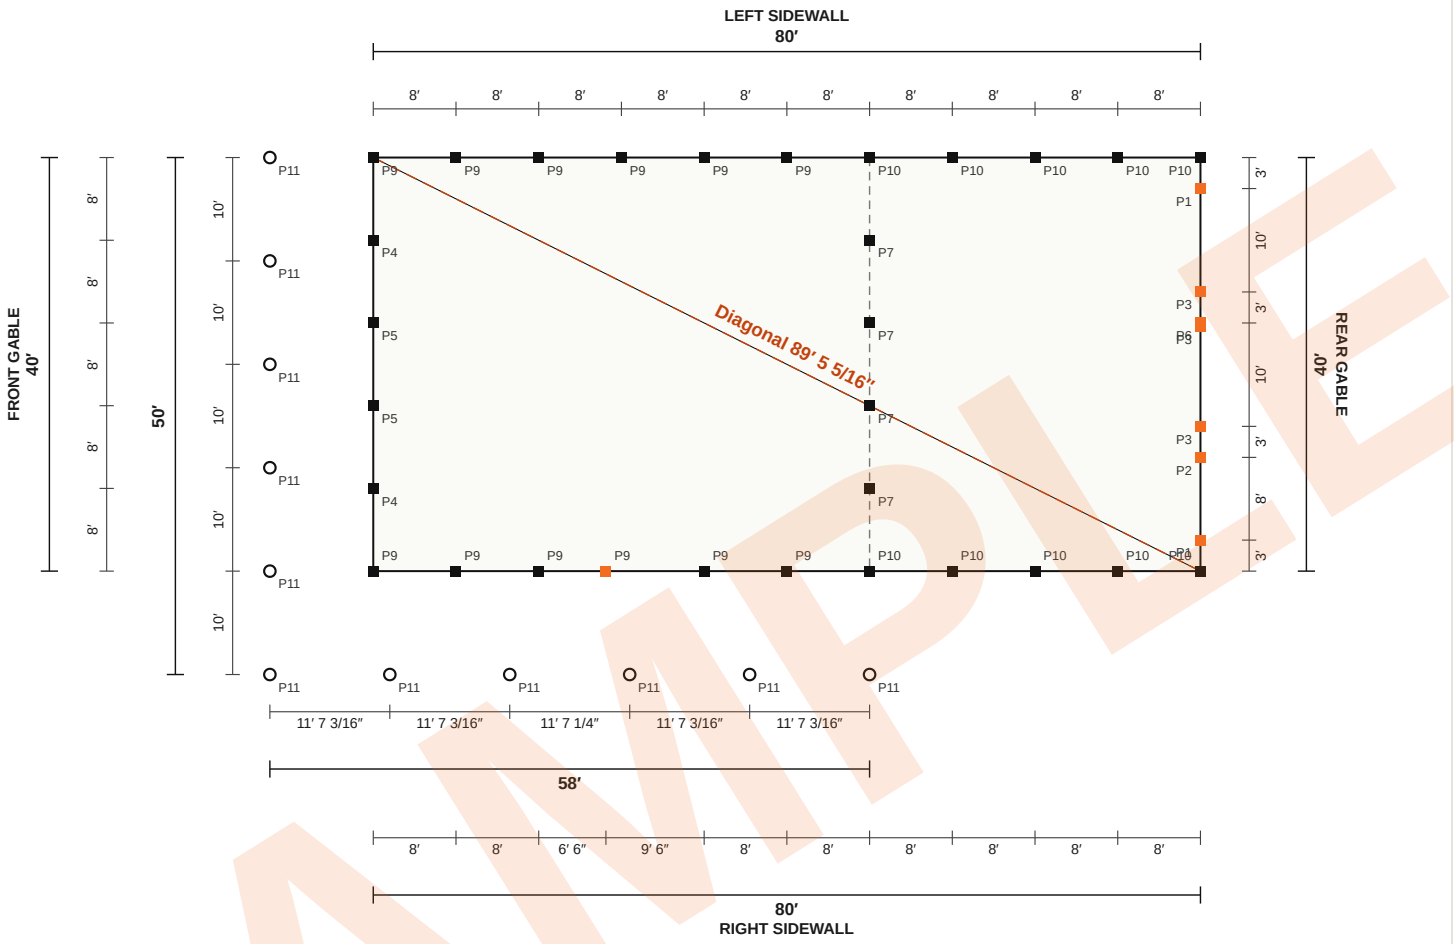

Tag	Post	Qty	Column length	Hole and footing
P1	**Perma-Column post-frame columns · additional opening columns**	2	22′	18″ hole × 4′ deep · Perma-Column foundation units
P2	**Perma-Column post-frame columns · additional opening columns**	1	24′	18″ hole × 4′ deep · Perma-Column foundation units
P3	**Perma-Column post-frame columns · additional opening columns**	3	26′	18″ hole × 4′ deep · Perma-Column foundation units
P4	**Perma-Column post-frame columns · gable-interior columns**	2	20′	18″ hole × 4′ deep · Perma-Column foundation units
P5	**Perma-Column post-frame columns · gable-interior columns**	2	22′	18″ hole × 4′ deep · Perma-Column foundation units
P6	**Perma-Column post-frame columns · gable-interior**	1	26′	18″ hole × 4′ deep · Perma-Column foundation units

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

Tag	Post	Qty	Column length	Hole and footing
	columns			
P7	**Perma-Column post-frame columns · living-section back-gable interior columns**	4	20′	18″ hole × 4′ deep · Perma-Column foundation units
P8	**Perma-Column post-frame columns · living-section back-gable man-door support column**	1	20′	18″ hole × 4′ deep · Perma-Column foundation units
P9	**Perma-Column post-frame columns · sidewall/corner columns**	12	16′	18″ hole × 4′ deep · Perma-Column foundation units
P10	**Perma-Column post-frame columns · sidewall/corner columns**	10	20′	18″ hole × 4′ deep · Perma-Column foundation units
P11	**Attached-roof posts**	11	See attached-roof order	18″ hole × 4′ deep · Perma-Column foundation units

Orange posts frame a doorway (overhead, sliding or man door); black posts are wall and corner posts.

Spacing is measured along each wall from the outside corner of the building to the center of each post; corner posts sit inside the corner. Square the layout so both corner-to-corner diagonals read 89′ 5 5/16″.

SAMPLE

SAMPLE ONLY - BUILT - not for construction or ordering

IMPORTANT LEGAL NOTICE AND LIMITATIONS

MATERIAL TAKEOFF ONLY — NOT ENGINEERING OR CONSTRUCTION DRAWINGS

This report is provided solely as a preliminary material-quantity estimate based on information supplied by the customer and the calculator settings shown in the report. Jesse McCoun and BUILT are not licensed professional engineers or architects. This report is not an engineered design, architectural or construction drawing, permit drawing, structural analysis, certification, or representation of structural adequacy, code compliance, or permit approval.

This report does not determine or verify design loads; wind, snow, rain, flood, or seismic requirements; soil or site conditions; foundations or post embedment; truss or component engineering; member sizes, spans, connections, or bracing; fire and life-safety requirements; zoning; utilities; mechanical, electrical, plumbing, or HVAC systems; accessibility; energy-code compliance; or any other project-specific legal or code requirement.

Before ordering materials, applying for a permit, or beginning construction, the owner, customer, contractor, and suppliers are responsible for independently verifying all dimensions, quantities, specifications, opening locations, field conditions, product requirements, and applicable codes. Obtain all required approvals and any structural design or sealed drawings from a properly licensed design professional and the authority having jurisdiction. Supplier-engineered components must be reviewed and installed according to their approved drawings and instructions.

This report is an estimating aid only and must not be relied upon as a substitute for professional design, engineering judgment, permit approval, manufacturer instructions, or field verification. Quantities and specifications may change after engineering, supplier review, code review, or site verification. To the fullest extent permitted by applicable law, BUILT makes no warranty that this report is complete, structurally adequate, code compliant, fit for a particular construction purpose, or acceptable for permitting, and is not responsible for errors or losses resulting from inaccurate or incomplete customer information, unverified conditions, substitutions, later changes, or use of this report beyond its stated estimating purpose.

RECIPIENT ACKNOWLEDGMENT

By ordering, accepting, or using this report, the recipient acknowledges these limitations and accepts responsibility for obtaining all required professional review, engineering, field verification, permits, and approvals before construction.

SAMPLE